Denfoil corner protector for sharp edges and corners Cable protectors Rubber Cable protectors recycled plastic Extra Stong

High performance impact protection profiles made of polyurethane Temperature resistant from -40°C to +100°C Manufactured according to DIN 4102 B2. Resistant to solvents, UV-resistant and silicone-free. Very flexible due to patented production technology.

Easy to apply with an adhesive strip on a clean surface.

Type profile A

Round model Ø40 mm with an inner corner of 25x25mm Colour black/yellow for extra safety.

Mounting: tape

Number	Туре
75DF130300M	Profile A length 1 meter
75DF130300G	Profile A length 5 meter

Type profile B

Round model Ø40 mm with internal slot of 19x8mm Colour black/yellow for extra safety.

Mounting: tape

Number	Туре
75DF130301M	Profile B length 1 meter
75DF130301G	Profile B length 5 meter

Type profiel C

Half-round model H30XB40mm Colour black/yellow for extra safety.

Mounting: tape

Number	Туре
75DF130302M	Profile C length 1 meter
75DF130302G	Profile C length 5 meter

Type profiel D

Flat model H20XB50mm Colour black/yellow for extra safety. Mounting: tape

Number	Туре
75DF130303M	Profile D length 1 meter
75DF130303G	Profile D length 5 meter


Type profiel E

Hoek model 26x26mm dikte 7mm Colour black/yellow for extra safety.

Mounting: tape

Number	Туре
75DF130304M	Profile E length 1 meter
75DF130304G	Profile E length 5 meter



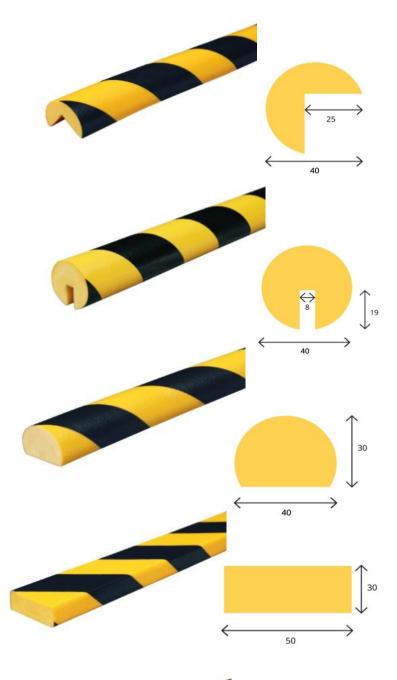




Type profiel F

Hoek model 40x10mm

Colour black/yellow for extra safety.

Mounting: tape

Number	Туре
75DF130305M	Profile F length 1 meter
75DF130305G	Profile F length 5 meter




Type profiel G

U profile model 26x30mm BxH, slot 8x19mm BxH Colour black/yellow for extra safety.

Mounting: tape

Number	Туре
75DF130306M	Profile G length 1 meter
75DF130306G	Profile G length 5 meter

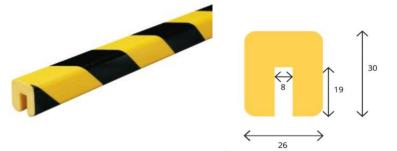


Type profiel G

Corner model 47x47mm thickness 12mm Colour black/yellow for extra safety.

Mounting: tape

Number Ty	rpe
75DF130307M Pr	ofile H length 1 meter
75DF130307G Pr	ofile H length 5 meter

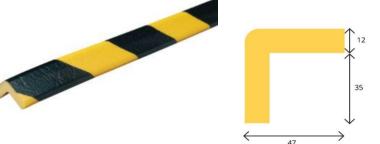


Type profiel R30

Half-round scale Ø20 x 40mm thickness 10mm Colour black/yellow for extra safety.

Mounting: tape


Number	Туре
75DF130321M	Profile R30 length 1 meter

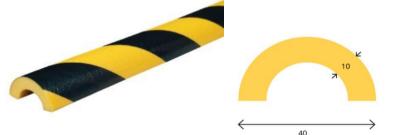

Type profiel R50

Half-round scale Ø40 x 70mm thickness 10mm Colour black/yellow for extra safety. Mounting: tape

Number	Туре
75DF130322M	Profile R50 length 1 meter





Cable protectors

Rubber cable protectors with a bright yellow color cover.

For a safety passage on locations where cables are laying on the ground. Suitable for use in commercial and industrial applications.

Can be connected to achieve the desired length. The material is synthetic rubber.


Number	Туре
75CP02	Cable protector 2-channel
	Dimensions 1000x250x50mm Capacity 2.000 kg Channel opening 30x30mm Weight approx. 8kg

Number	Туре
75CP02C	Cable protector 2-channel
	Elbow 30°
	Capacity 2.000 kg
	Channel opening 30x30mm
	5a5 5p59 50x5011111

Number	Type
75CP03	Cable protector 3-channel
	Dimensions 900x350x50mm
	Capacity 5.000 kg
	Channel opening 35x35mm
	Weight approx. 13kg
	- · · · · · · · · · · · · · · · · · · ·

Number	Туре
75CP03C	Cable protector 3-channel
	Elbow 30°
	Capacity 5.000 kg
	Channel opening 35x35mm

Number	Туре
75CP05	Cable protector 5-channel
	Dimensions 800x450x50mm
	Capacity 3.000 kg
	Channel opening 35x35mm
	Weight approx. 13kg
	2
Number	Туре
Number	Туре
Number 75CP05C	Type Cable protector 5-channel
	•
	Cable protector 5-channel
	Cable protector 5-channel Elbow 30°

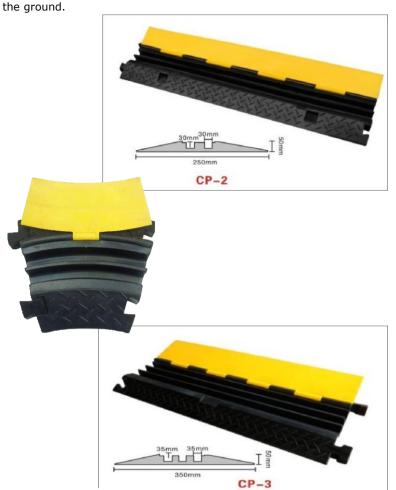



Cable channel extra HDMaterial HP recycled plastics.
Checker structure for non slip and optimum grip.
With a bright yellow cover for extra visibility.

Number	Туре
02KBB1250	Cable protector 2-channel Dimensions 980x240x40mm Capacity 5.500 kg Channel opening 30x30mm Weight approx. 6.8kg



Number	Туре
02KBB1350	Cable protector 3-channel
	Dimensions 900x500x70mm
	Capacity 9.000 kg
	Channel opening 50x50mm
	Weight approx. 17kg
	- · · · · · · · · · · · · · · · · · · ·



Number	Туре
02KBB1450	Cable protector 5-channel Dimensions 900x500x50mm Capacity 9.000 kg Channel opening 35x35mm Weight approx. 15kg

