

Matting
Notrax Matting
Floor matting
Door matting
Electric insulating matting



Repair Management Nederland B.V.
 More management less firefighting

Standard Coco matting

Wear resist rubber backing.



Number	Description	IMPA
740201	Coco matting 1 mtr width on roll Can be ordered per meter length. Excl. Cutting cost.	NA
740201B	Cutting cost per cut.	

Number	Description	IMPA
740203	Coco matting 1000 x 600 mm	511023
740208	Coco matting 1200 x 900 mm	511024



Combination door mat

Galvanized steel wire with coco brushes.

Number	Description	IMPA
740205	Combination mat 600 x 400mm	511031



Door mat antracite grey and dark brown

Polyamide mat with PVC backing.

Removes moisture and dirt from the shoes.

Washable on 30°C

Not for tumble-dryer!!

Color DARK BROWN

Number	Description	IMPA
740208BR	600 x 400 mm	NA
740209BR	700 x 400 mm	NA
740210BR	900 x 600 mm	511151
740211BR	1300 x 900 mm	511153
740212BR	1500 x 900 mm	511154
740214BR	1900 x 1200 mm	NA



Colro ANTRACITE GREY

Number	Description	IMPA
740208AN	600 x 400 mm	NA
740209	700 x 400 mm	NA
740210	900 x 600 mm	511151
740211	1300 x 900 mm	511153
740212	1500 x 900 mm	511154
740214	1900 x 1200 mm	NA



3M Nomad extra duty

Polyamide fibres to remove moisture and dirt.


Vinyl backing with approx. 20mm borders each side

Number	Description	IMPA
943M2255	900 x 700 mm grey	511152



Rubber open ring mat

Heavy duty quality can be connected to each other.
 For outside (deck) use where water can be drained easily trough the open structure.
 Cleaning; hose of with water.

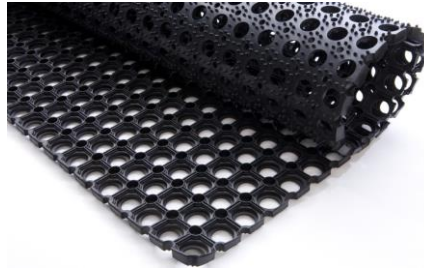

Number	Description	IMPA
740234	1000 x 1000 x 16 mm on roll	511071
740234B	Connector 16 mm	511072
740235	1500 x 1000 x 22 mm	511071
740237	1200 x 800 x 16 mm	511071
740238	1200 x 800 x 22 mm	511071

Vidar coin mat

For indoor use in industrial applications.
 A raised circular design on the surface of the mat.
 Temperature range: -30°C up to +70°C
 Specifications: Strong and wear resistant.
 With a anti-slip profile on top of the mat.
 Hardness Shore A ± 5° = 80
 Specific gravity grs/cm³ = 1,6
 Tensile strength Mpa = 3,5
 Elongation on break % = 250
 Shear mm³ = 400
 Compression at 70°C for 22 hour % = 40



Number	Thick	Width	Length	Color	Quality
21ZECS803000	3 mm	1,2 mtr	10 mtr	black	SBR
21ZECS803001	3 mm	1,0 mtr	10 mtr	black	SBR
21ZECSG803000	3 mm	1,2 mtr	10 mtr	grey	SBR
21ZECS804501	3 mm	1,0 mtr	10 mtr	grey	SBR

Vidar coin mat M3 FIRECLASS

For indoor use in industrial applications.
 A raised circular design on the surface of the mat.
 Temperature range: -30°C up to +70°C
 Specifications: Strong and wear resistant.
 With a anti-slip profile on top of the mat.
 Hardness Shore A ± 5° = 75
 Specific gravity grs/cm³ = 1,6
 Tensile strength Mpa = 4
 Elongation on break % = 250
 Shear mm³ = 400
 Compression at 70°C for 22 hour % = 40



Number	Thick	Width	Length	Color	Quality
21ZE010675451Z	4,5 mm	1,0 mtr	10 mtr	black	SBR
21ZE01067545Z	4,5 mm	1,2 mtr	10 mtr	black	SBR

Checkermat

Checked field design for excellent traction and easy cleaning.
 NBR oil resistant.
 Temperature range: -20°C to +70°C
 Hardness Shore A ± 5° = 65
 Specific gravity grs/cm³ = 1,5
 Tensile strength Mpa = 3
 Elongation on break % = 200



Number	Thick	Width	Length	Color	Quality
21ZE01063142	3 mm	1,4 mtr	10 mtr	black	NBR
21ZE01065142	5 mm	1,4 mtr	10 mtr	black	NBR

Electrical Insulating Matting EPDM Grey

For use on switchboard flooring.
 Wear resist mat with a ribbed profile.
 Electrical insulating to prevent an electric shock.
 According to standard IEC CEI 61111, Class 2 (3mm), Class 4 (4,5mm).
3,0 mm Resistant against 30.000V (30kV), Proof Voltage 20kV.
 Maximum usage voltage 17.000V (17kV).
5,0 mm Resistant against 50.000V (50kV), Proof Voltage 40kV.
 Maximum usage voltage 36.000V (36kV).


Number	Thick	Width	Length	Color	IMPA
7707298	3 mm	1,0 mtr	10 mtr	grey	511098
7707299	4,5 mm	1,0 mm	10 mtr	grey	511099



Fine rib mat, oil resistant NBR

Strong and wear resist.
 Has an anti-slip ribberd surface and a fine cloth pattern on the reverse. Oil resistant NBR.
 Ideally suited for loose lay applications for floors, walkways, rubbers, loading areas, work benches etc.
 Temperature range: -20°C up to +70°C
 Hardness Shore A ± 5° = 65
 Specific gravity grs/cm³ = 1,5
 Tensile strength Mpa = 3,5
 Elongation on break % = 250


Number	Thick	Width	Length	Color	Quality	IMPA
21ZE01050303	3 mm	1,0 mtr	10 mtr	black	NBR	511085
21ZE01050302	3 mm	1,2 mtr	10 mtr	black	NBR	511085

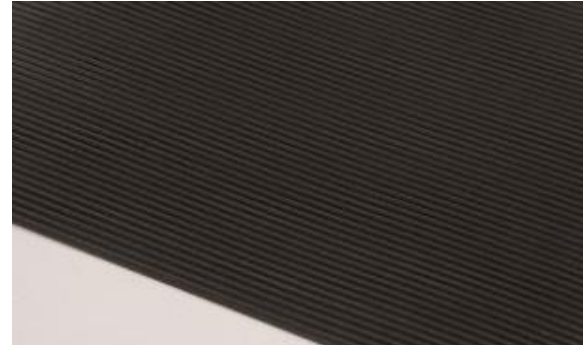

Fine rib mat, standard SBR

Strong and wear resist.
 Has an anti-slip ribberd surface and a fine cloth pattern on the reverse.
 Ideally suited for loose lay applications for floors, walkways, rubbers, loading areas, work benches etc.
 Temperature range: -20°C up to +70°C
 Hardness Shore A ± 5° = 65
 Specific gravity grs/cm³ = 1,5
 Tensile strength Mpa = 3
 Elongation on break % = 200

Number	Thick	Width	Length	Color	Quality	IMPA
21ZE01050310	3 mm	1,0 mtr	10 mtr	black	NBR	511085
21ZE01050300	3 mm	1,2 mtr	10 mtr	black	NBR	511085

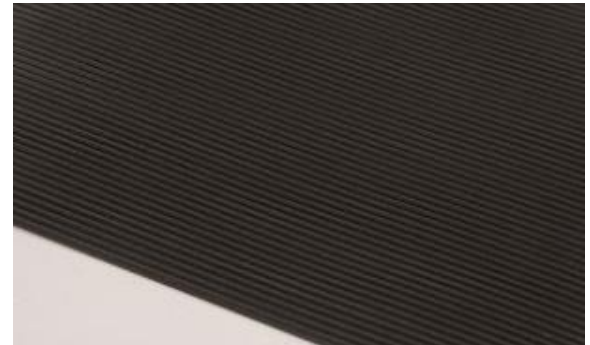

Notrax Entrance Mat UNI Washable

For medium traffic.
 Frieze 100% Polyamide with 100% nitril rubber backing.
 Nitril rubber borders 2,5 cm on each side.
 Thickness 8,5 mm Weight 2,8 kg/m²
 Fire rating EN 13501-1 Bfl-S1
 Machine washable at +50°C or vacuum clean.

Number	Width	Length	Color
74NO010S002301BL	600 mm	850 mm	black
74NO010S003401BL	850 mm	1150 mm	black
74NO010S003501BL	850 mm	1500 mm	black
74NO010S004601BL	1150 mm	1800 mm	black

5 different colors available.



Notrax Entrance Mat Guzzler

For medium intensive traffic
Decalon yarns and natural rubber backing.
Rubber borders 2,5 cm on each side.
Thickness 10,5 mm, Weight 5,2 kg/m²
Fire rating ASTM D2859 passes DOC-FF-1-70
Vacuum/shampooing or use injection/extraction
methode to clean.

Number	Width	Length	Color
74NO166060090CH	600 mm	900 mm	black
74NO166060120CH	900 mm	1200 mm	black
74NO166090120CH	900 mm	1500 mm	black
74NO166090300CH	900 mm	3000 mm	black
74NO166120180CH	1200 mm	1800 mm	black
74NO166120300CH	1200 mm	3000 mm	black

7 different colors available.



Notrax Outdoor Entrance Mat Wayfarer 16 mm

For heavy duty traffic.
Thick coils (strand diameter 1 mm) of
extruded from 100% PVC.
Backing vinyl (DOP free).
Pressed borders on all sides. Thickness 16 mm.
Weight 6 kg/m².
Fire rating EN 13501-1 Bfl-S1
Wash with a hose or vacuum clean.
Colors; dark grey, navy blue and red.

Number	Width	Length	Color
74NO267S0035CH	900 mm	1500 mm	grey
74NO267S0046CH	1200 mm	1800 mm	grey
74NO267S0035NB	900 mm	1500 mm	blue
74NO267S0046NB	1200 mm	1800 mm	blue
74NO267S0035RE	900 mm	1500 mm	red
74NO267S0046RE	1200 mm	1800 mm	red



Notrax Outdoor Entrance Mat Wayfarer 10 mm

For medium traffic.
Fine loops of extruded Vinyl from
100% PVC.
Backing vinyl (DOP free).
Pressed borders on all sides. Thickness 10 mm.
Weight 3 kg/m².
Fire rating EN 13501-1 Bfl-S1
Wash with a hose or vacuum clean.
Colors, only grey

Number	Width	Length	Color
74NO265S0035CH	900 mm	1500 mm	grey
74NO265S0046CH	1200 mm	1800 mm	grey



Notrax 345 Rubber Brush outdoor mat

For heavy traffic.
Natural rubber with bevelled edges on all sides.
Thickness 16 mm, weight 13,6 kg/m²
Cleaning; hose of with water.

Number	Width	Length	Color
74NO345S2432BL	600 mm	800 mm	black
74NO345S3239BL	800 mm	1000mm	black
74NO345S3660BL	900 mm	1500 mm	black
74NO345S3672BL	900 mm	1800 mm	black



Notrax 599B Oct-O-Flex Bevelled mat

For loose lay placement indoors or outdoors.
For heavy traffic.

Natural rubber, bevelled edges on all sides.

Thickness 12,5 mm, weight 9,8 kg/m²

Suitable for use in extreme weather, octagonal ring design with open construction. Small holes diameter 14 mm, compliant with EU norm for public entrances.

Cleaning; hose of with water.

Number	Width	Length	Color
74NO599B0035OB	900 mm	1500 mm	black
74NO599B0046OB	1200 mm	1800 mm	black
74NO599B7090OB	700 mm	900 mm	black

**Notrax Diamond Plate Runner 4,7mm Black/Yellow**

For dry industrial applications, medium duty traffic.

Both sides with a safety yellow colored line.

PVC (DOP free), bevelled edges on all sides.

Thickness 4,7 mm, weight 4 kg/m²

Fire rating EN 13501-1 Bfl-S1

Slip rating R9

Free of DOP, free of DMF, free of ozone depleting, substances, free of silicone and free of heavy metals.

Cleaning by daily sweeping with a brush.

Number	Width	Length	Color
74NO737120010	1200 mm	10 mtr	Black/yellow
74NO737120022	1200 mm	22,8 mtr	Black/Yellow
74NO737091022	910 mm	22,8 mtr	Black/yellow

**Notrax 745 Dots 'n' Roll 3.5mm**

An allround floor covering for industrial applications.

For indoor use with medium traffic.

SBR Rubber, no borders.


Thickness 3,5 mm, weight 5,9 kg/m²

Slip rating R9

Free of DOP, free of DMF, free of ozone depleting, substances, free of silicone and free of heavy metals.

Cleaning by daily sweeping with a brush.

Number	Width	Length	Color
74NO745R0100BL	1000 mm	10 mtr	black
74NO745R0100GY	1000 mm	10 mtr	grey

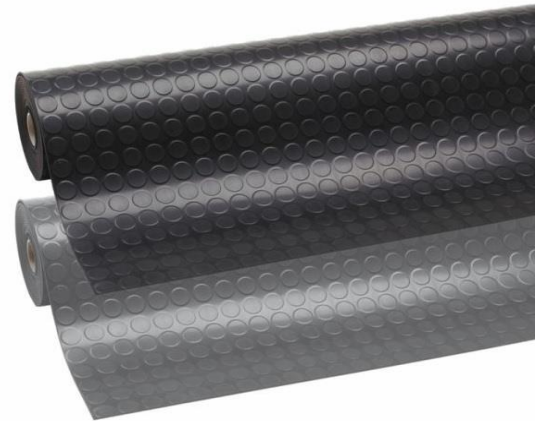**Notrax 585 Eco Stance mat**

For wet/dry and oily environments.

For medium duty in industrial applications.

For placement in ESD assembly lines, picking packing and logistics warehouses, individual work stations. 100% nitril rubber, ramps on 4 sides are raised to form a holder tray around the mat.

Rough gripper surface prevents the sorbent from shifting.

Thickness 12,7 mm, weight 6,8 kg/m²

Free of DOP, free of DMF, free of ozone depleting, substances, free of silicone and free of heavy metals.

Cleaning by hose of with water.

Accessories: 580F Standard Sorbent for Eco Stance

Number	Width	Length	Color
74NO585S0035BL	1570 mm	870 mm	zwart
74NO580F	Standard Sorbent		

