

Stream Lite flashlights
Stream Lite headlamps
NightSearcher lamps
Bright Star flashlights
Adaro Adalit headlamps ATEX
KSE headlamps ATEX

Petzl headlamps
Led Lenser flashlights
Led Lenser headlamps
Pelican flashlights
Pelican headlamps
Sonca flashlights
Osram flashlights



Repair Management Nederland B.V.
 More management less firefighting



Stinger Xenon rechargeable, lightbeam 210 meter
 Dimension 18,7 x 4,1 cm. Battery run-time 1,75 hour.
 Xenon lamp 90 lumen, 11.000 CD
 Charge time 15,5 hour / 3,5 hour with rapid charger
 Chargers possible for 12V/24V/115V/230V
 NiMh battery 3,6V 2800Ah, rechargeable 750 cycli
 Aluminium housing, spot/flood adjustment.
 Self cleaning push button. Unbreakable lens.



Number	Description
900350	Stinger NiMh Xenon With charger 230V and battery
900350A	Spare batterij NiMh
900360	Xenon spare lamp (Polystinger/Stinger)

Stinger LED rechargeable
 Dimension 21,4 x 4,1 cm. Lightbeam 261 meter
 350 lumen, 17.000 CD, lifetime LED 50000 hour
 NiMh battery 3,6V 2800Ah, rechargeable 750 cycli
 Charge time 15,5 hour / 3,5 hour with rapid charger
 Chargers possible for 12V/24V/115V/230V
 Aluminium housing with rubber grip.
 Battery run-time high 3 hour, medium 7 hour, low 13 hours
 Strobe modus 13 hours.



Number	Description
900353	Stinger LED NiMh

Accessories Stinger:
 Carry bag
 Fast charger
 Lens red, blue, green, IR.
 Traffic cones red, yellow, white, blue, Hi-Vis.
 Piggy-pack charger with extra battery
 5-unit bank 2,5 hour fast charger for Stinger LED lamps.



Streamlight Protac 2L 4C LED
 Dimensions 12.12x2.29x1.96 cm. Weight 187 gram
 260 lumen, 5.600 CD, lightbeam 150 meter
 2x CR123A Lithium battery included
 Runtime high 3 hour, medium 50 hour, strobe 6 hour.
 IP-X7 1 meter watertight, impact resistant up to 2 meter



Number	Description
901130	Protac 2L 4C LED

Streamlight Stinger LED HP rechargeable

NEW HP LED 267% more output as the Stinger Led and DS led.
 Lifetime LED 50.000 uur
7400 lumen, 48000 CD, lightbeam 438 meter
 Dimension 23,4x5,59 cm, weighth 385 gram, IP-X4
 Chargers possible for 12, 24, 115, 230 Volt
 Battery run-time high 3 hour, medium 7 hour, low 13 hour, strobe 10 hour
 NiMh battery 3,6V 2800 mAh, charge time 10 hour, 750 cycli
 NiMh accu 3,6V 2800 mAh, laadtijd 10 uur, 750 cycli



Number	Description
900359	Stinger HP LED

900361	Stinger LED HP Dual Switch NiMh With dual switch Means two switches, one on te front and one on the back.
--------	--



Streamlight Stinger LED HL

Dimension 21,4 x 4,1 cm. Lightbeam 297 meter
 640 lumen, 22.000 CD, lifetime LED 50.000 hours
 NiMh battery 3,6V 2800Ah, rechargeable 750 cycli
 Charge time 15,5 hour / 3,5 hour with rapid charger
 Charger available for 12V/24V/230V
 Aluminium casing with rubber grip.
 Battery run-time high 15 hour, medium 2 hour, low 4 hour



900362	Stinger LED HL NiMh
--------	----------------------------

900349	Stinger LED HL Dual Switch NiMh With dual switch Means two switches, one on te front and one on the back.
--------	--



Polystinger LED rechargeable

Dimension 20,5 x 4,5 cm. Lightbeam 310 meter
 385 lumen, 24.000 CD, lifetime LED 50.000 hour
 NiMh battery 3,6V 2800Ah, rechargeable 750 cycli
 Charge time 15,5 hour / 3,5 hour with rapid charger
 Chargers possible for 12V/24V/115V/230V
 Plastic housing.
 Run-time battery high 3 hour, medium 7 hour, low 7 hour, strobe modus 13 hours



Number	Description
900355	PolyStinger LED black NiMh With charger 230V
900357	Polystinger LED yellow Nimh With charger 230V
900357C	PolyStinger LED yellow NiMh With charger 12/230V
900356	Polystinger DS LED NiMh With dual switch Means two switches, one on te front and one on the back.

900355	PolyStinger LED black NiMh With charger 230V
--------	--

900357	Polystinger LED yellow Nimh With charger 230V
--------	---

900357C	PolyStinger LED yellow NiMh With charger 12/230V
---------	--

900356	Polystinger DS LED NiMh With dual switch Means two switches, one on te front and one on the back.
--------	--

Number	Description
900355SET	Set of 5 lamps with multi-charger
900355D	Separate charger Polystinger
900355E	Separate cable 12/24V Polystinger
900355L	Plug charger 230V Polystinger
900355TW	Spare lamp Polystinger
900355SN	Rapid charger 230V Polystinger
900355PB	Piggybag charger with Nimh battery
900355ML	Rapid charger 230V for 5 pcs Polystinger

900355SET	Set of 5 lamps with multi-charger
-----------	--

900355D	Separate charger Polystinger
---------	------------------------------

900355E	Separate cable 12/24V Polystinger
---------	-----------------------------------

900355L	Plug charger 230V Polystinger
---------	-------------------------------

900355TW	Spare lamp Polystinger
----------	------------------------

900355SN	Rapid charger 230V Polystinger
----------	--------------------------------

900355PB	Piggybag charger with Nimh battery
----------	------------------------------------

900355ML	Rapid charger 230V for 5 pcs Polystinger
----------	--



Streamlight Strion LED

Dimension 15 x 3,2 cm. Lightbeam 188 meter
260 lumen, 10.00 CD, lifetime LED 50.000 uur
Li-Ion battery, rechargeable 500 cycli.
Chargers possible for 12V/115V/230V
Charge time 3 hour.
Aluminium housing, weight 148 gram.
Run-time battery high 2 hour, medium 4 hour, low 7,5 hour
Multifunctional push- and turn button.
Watertight IPX4

Number	Description
900358	Strion LED rechargeable NiMh

Streamlight Strion LED HL

Dimension 15 x 3,2 cm. Lightbeam 200 meter
500 lumen, 10.000 CD, lifetime LED 50.000 hour
Li-Ion battery, rechargeable 1000 cycli.
Chargers possible for 12V/115V/230V
Charge time 3 hour.
Aluminium housing, weight 148 gram.
Runtime battery high 1 hour, medium 2 hour, low 3,5 hour
Multifunctional push- and turn button.
Watertight IPX4

900363	Strion LED HL rechargeable Nimh
--------	---------------------------------

Streamlight Strion LED HPL

Dimension 17,8 x 5,6 cm. Lightbeam 390 meter
615 lumen, 40.000 CD, lifetime LED 50.000 hour
Li-Ion battery, rechargeable 500 cycli.
Charger available for 12V/115V/230V
Charge time 3 hour.
Aluminium housing, weight 202 gram.
Runtime battery high 2 hour, medium 4 hour, low 7,5 hour
Multifunctional push- and turn button.
Watertight IPX4

900364	Strion LED HPL rechargeable Nimh
--------	----------------------------------

Accessories Strion:

Carry bag
Lens red, blue, green, IR.
Traffic cones red, yellow, white, blue, Hi-Vis.
Fast charger 12/24V, 230V for 6 Strion lamps



Streamlight Scorpion LED

160 lumen, 9.000 CD, lightbeam 190 meter
Dimension 14,5x3,2 cm. Weight 150 gram.
Rubber grip, unbreakable lens.
LED C4 light source, lifetime 100.000 hour
Lithium batteries 2x CR123
Battery run-time 3,5 uur

900365	Scorpion LED
--------	--------------

Streamlight Ultrastinger LED

1.100 lumen, 65.000 CD, lightbeam 510 meter.
Dimension 30x6x3cm. Weight 564 gram.
Adjustable focus. Impact protection up to 3 meter.
Watertight IP-X4
Ni-Mh battery, charge time 10 hour.
Runtime high 1.5 hour, medium 4.5 hour, low 16 hour,
strobe 3 hour.
Ten Tap programming switch for a programmable
optic lens.

900366	Ultrastinger LED
--------	------------------



Streamlight SL-20LP

3500 lumen, 60.000 CD, lightbeam 490 meter
 Dimension 33,5x6,35 cm.
 Watertight IPX-4
 LED C4 lightsource, lifetime LED 50.000 hour
 Nimh batteries 6v
 Runtime battery high 2 hour, low 4 hour, strobe 50 hour
 Rechargeable approx. 1000 cycli.

NIEUW: SL-20LP 350 LUMEN!



Number	Description
900500	Streamlight SL-20LP Black With 230V charger
900501	Streamlight SL-20LP Black With 12-230V charger
900502	Streamlight SL-20LP Orange With 230V charger
900503	Streamlight SL-20LP Orange With 12-230V charger
900504	Streamlight SL-20LP Yellow With 230V charger
900505	Streamlight SL-20LP Yellow With 12-230V charger

Streamlight SL-20XP

120 lumen, 16.000 CD, lightbeam 253 meter
 Dimension 33,5x6,4 cm. Weight 410 gram
 Pre focused light source, very bright and focussed beam
 3 LED's for extra long lifetime.
 Nimh batteries 6v
 Runtime batteries LED 75 hour
 Rechargeable circa 750 cycli.
 Emergency light function
 Watertight IPX-4



Number	Description
900510	Streamlight SL-20XP Black With 230V charger
900511	Streamlight SL-20XP Black With 12-230V charger
900512	Streamlight SL-20XP Orange With 230V charger
900513	Streamlight SL-20XP Orange With 12-230V charger
900514	Streamlight SL-20XP Yellow With 230V charger
900515	Streamlight SL-20XP Yellow With 12-230V charger

Streamlight Knucklehead Flood Yellow

360 degrees adjustable lamphead.
 200 lumen, 1150 CD, lightbeam 68 meter
 Dual C4 LED, lifetime 50.000 hour
 Batteries 4 x AA Alkaline.
 Battery run-time High 3,30 hour, low 16 hour.
 IP-X4
 Dimension 23,4x27,2 cm, weight 519 gram.
 With magnet and mounting hook.



Number	Description
900960	Streamlight Knucklehead 4AA Floodlight yellow housing
900961	Streamlight Knucklehead 4AA Floodlight black housing
900962	Streamlight Knucklehead 4AA Spotlight orange housing 180/55 lumen, 11.000 CD, lightbeam 210 meter Single C4 LED

Streamlight E-Spot Litebox LED

Lens SPOT type.
540 lumen, 55.000 CD, lightbeam 469 meter
With C4 LED lifetime 50.000 hour
Charge time 18 hour, run-time battery high 7 hour,
low 15 hours.
Dimension 29,2x13 cm, weight 3580 gram. IP-X4
Lead battery 6 Volt, 12.000 mAh.
Rechargeable ca. 400 cycli.
IP-X4



Number Description

900953 **E-Spot Litebox LED**

900954 **E-Spot Litebox LED PF**
With emergency light function

900952 **E-Spot Firebox**
Als E-Spot maar dan voorzien van 2 stuks
blauwe signalerings LEDs aan de achterzijde.
Speciaal voor brandbestrijders.



Streamlight E-Flood Litebox LED

Lens FLOOD type.
615 lumen, 4.000 CD, lightbeam 126 meter
With C4 LED lifetime 50.000 hour
Charge time 18 hour, battery run-time high 8 hour,
low 18 hours.
Dimension 29,2x13 cm, weight 3500 gram. IP-X4
Lead battery 6 Volt, 12.000 mAh.
Rechargeable ca. 400 cycli.
IP-X4



Number Description

900955 **E-Flood Litebox LED**

900956 **E-Flood Litebox LED PF**
With emergency light function

900957 **E-Flood Firebox**
As E-Flood, extra 2 pieces blue signal LEDs
at the back of the lamp.
Especially for fire fighters.



Streamlight Propolymer 3C Xenon Zone 1

50 lumen
Luxeon LED, lifetime LED 16.000 hour.
Dimension 23,6x5,1 cm, weight 414 gram.
II 2 G Eex ib T4 II 2D IP65 T63° SNCH 04 ATEX 3640
Batteries 3 x C Alkaline (no 770411)
Maximum runtime batteries 5,5 hour.

Number Description

900965 **Streamlight Propolymer 3C Zone 1**

Streamlight Propolymer 3C LED Zone 1

54 lumen
Lifetime LED 100.000 hour.
Dimension 21,7x4,9 cm, weight 383 gram.
II 2 G Eex ib T4 II 2D IP65 T70° SNCH 04 ATEX 3640X
Batteries 3 x C Alkaline (no 770411)
Maximum runtime batteries 336 hour.



900966 **Streamlight Propolymer 3C Zone 1**

Streamlight Propolymer 4AA Xenon Zone 1

34 lumen, 11.000 CD
Lifetime Xenon light source 30 hour.
Dimension 16,5x1,1 cm, weight 178 gram.

II 2 G Eex ib T4 II 2D IP65 T74° SNCH 04 ATEX 3639

Batteries 4 x AA Alkaline (no 770412)
Maximum runtime batteries 4 hours



Number Description

900967 **Streamlight Propolymer 4AA Zone 1**

Streamlight Propolymer HAZ-LO 3C

150 lumen, 7000 CD, lightbeam 167 meter
C4 LED technology, lifetime LED 50.000 hour
Dimension 23,62 x 3,71 cm, weight 394 gram.

**FTZU 12 ATEX 0183X II 1G Ex ia IIC T4 Ga:
II 1D Ex ia IIIC T99C Da**

Impact resitant 3 meter
IP67 - Ipx-4 and 1 meter depth for 30 minutes.
Maximum runtime batteries 18 hour.
Batteries 3 x C Alkaline (no 770411)
LED lifetime 50.000 hour



900968 **Streamlight Propolymer 3C Zone 0**

Ex Atex certified flashlight Streamlight Survivor LED

Scratch resistant polycarbonate lens. O-ring sealed.
With strong belt clip. Rugged nylon polymer body.
Atex approval II2G Eex e IB IIB T4 FTZU 04 ATEX 0353X

Dimension 17,2 x 7,2 cm, weight 437 gram.
Chargers possible for 12V/24V/115V/230V
LED C4, lifetime 50.000 hour.
175 Lumen, 36.000 CD, Lightbeam 379 meter.
NiCad 4,6V 1800 mAh battery, rechargeable 1000 cycli.
Charge time appr. 10 hour
Run-time battery high 3,3 hour, low 10 hour, strobe 7 hour



Number Description

900141 **Streamlight Survivor 1 Zone 1**

With charger and battery

900142 **Streamlight Survivor 1 Zone 0**

Low profile (means low building height)
4x AA Alkaline batteries (not included)
(batteries no 770412)
IP66

Atex Approval:

FTZU 15 ATEX 0046X II 1G Ex ia IIB T3/T4 Ga;
II 2G Ex ia IIC T3/T4 Gb



900143 **Streamlight Survivor 1 Zone 0**

Low profile (means low building height)
Li-Ion battery, 1.500 x rechargeable.
Charge time approx. 10 hour.
Runtime high 3,5 hour, low 10 hour,
strobe 5 hour
IP66

Atex Approval:

FTZU 15 ATEX 0046X II 1G Ex ia IIB T3/T4 Ga;
II 2G Ex ia IIC T3/T4 Gb



Accessories Survivor 1: 5 bank charger, rapid charger 12, 230 Volt
Traffic cone in red, yellow, blue, white and Hi-Vis

[Top](#)

Ex Atex certified hand lamp Streamlight LED Vulcan ATEX

Zone 2 gas and Zone 22 dust
The ideal lamp for fire fighters!!

Atex approval: II 3G Ex ic nA IIC T5 Gc / II 3D Ex tc IIIC T54°C Dc / FTZU 08 ATEX 0139X

180 lumen, 10.000 CD, lightbeam 632 meter.
Chargers possible for USB, 12V/230V
Weight 875 gram , IP66, impact resistant up to 2 meter.
Li-Ion battery. Charge time approx. 5 hour.
Runtime high 3.5 hour, low 7 hour, strobe 6 hour.



Number Description

900145	Streamlight LED Vulcan Atex Light source C4 LED Available for 3th quarter 2016
--------	---

Accessories Vulcan: Safetybelt

Adaro Adalit L-3000 ATEX Zone 0

200 Lumen, 10.000 CD, lightbeam 200 meter, 2 LED's of 135 lumen
Dimension 22,5 x 7 cm. Weight 500 gram.
Lamp head adjustable to an angle of 0-45-90°
Digital battery indicator for runtime and charge time.
Runtime high 4 hour, medium 6 hour, low 8 hour.
Chargers available for 12V/24V/230V
Charge time appr. 8 hour and appr. 500 cycli
Battery type Li-ion 3,6V

Ex Atex keur: LOM 12ATEX2087 X II 1G Ex ia IIC T4 Ga II 1D Ex ia IIIC T85 oC Da

Housing made of thermoplastic, IP67
Duo switch



Number Description

900520	Adaro Adalit L-3000 LED Atex Zone 0 With 230V charger
--------	---

Adaro Adalit L-3000 POWER ATEX Zone 0

300 Lumen, 15.000 CD, 3 LED's of 135 lumen.
Dimensions 22,5 x 7 cm. Weight 500 gram.
Lamp head adjustable to an angle of 0-45-90°
Digital battery indicator for runtime and charge time.
Runtime high 4 hour, medium 6 hour, low 8 hour.
Chargers available for 12V/24V/230V
Charge time appr. 8 hour and appr. 500 cycli
Battery type Li-ion 3,7V

Ex Atex keur: II 1G Ex ia IIC T4 Ga | II 1D Ex ia IIIC T 135 °C Da

Housing made of thermoplastic, IP67
Duo switch



Number Description

900521	Adaro Adalit L-3000 LED Atex Zone 0 With 230V charger Flood and spot lightbeam
--------	---

Heamlamp for helmet Adaro Adalit L-5

3 Watt power LED, output 135 lumen
Dimensions 15x3,8x4,4cm. Weight 145 gram
4 x battery AAA (no 770414)



Ex Atex approval LOM 12ATEX2004 Ex ia IIC T4 Ga Ex ia IIIC T85° C Da

Housing made of plastic material.
Runtime high 4 hour, medium 8 hour, low 30 hour.

Number Description

900540	Adaro Adalit L-5 Atex Zone 0
--------	-------------------------------------



Headlamp for helmet Adaro Adalit L-5R

3 Watt power LED, output 135 lumen
Dimensions 15x3,8x4,4cm. Weight 125 gram
Li-Ion 3,6V, charge time 4-6 hour. Charger in 12V or 230V
Ex Atex approval LOM 12ATEX2004 Ex ia IIC T4 Ga Ex ia IIIC T85° C Da
Housing made of plastic material.
Runtime high 4 hour, medium 8 hour, low 30 hour.



Number	Description
900541	Adaro Adalit L-5R Atex Zone 0

Fire fighter headlamp for helmet Adaro Adalit L-10

3 Watt power LED, output 135 lumen
Dimensions 15,6x5,6cm. Weight 180 gram
Li-Ion 3,7V, charge time 5 uur. Charger in 12V/24 or 230V
Ex Atex keur LOM 06 ATEX 2057X II 2 G Ex ia IIC T4 II 2 D IP65 T85° C
Housing made of plastic material.
Lifetime light source 40.000 hour. Rechargeable appr. 500 cycli
Helmet connection for Gallet f-1
Runtime battery indicator.



Number	Description
900542	Adaro Adalit L-10 Atex Zone 1
900545	Helmet adapter for L-5/L-5R
900546	Helmet adapter for L-10 Gallet F-2
900547	Multiple charger for Adalit L-5R

Headlamp for helmet Aduro Adalit LED L-50

Atex Zone 0 Stof and Gas. M1 / Zone 0
300 lumen, 15.000 CD, lightbeam 245 meter.
Low weight of 600 gram.
Adjustable focus, Flood/Spot.
Chargers for 12 / 24 / 230V
Charge time approx. 6 hour, battery Li-Ion
3 pieces 135 lumen LEDs.
Runtime high 12 hour and low 48 hour.
Watertight IP67
Ex Atex approval: II 1G Ex ia IIC T4 Ga;/ II 1D Ex ia IIIC T135°C Da;/ I M1 Ex ia I Ma



Number	Description
900522	Aduro Adalit L-50 Zone 0

Optic POWER LedEngine

Flood light

High penetrating light beam
245 M

Step lighting system

Headlamp Streamlight Septor HAZ-LO

85 lumen, 620 CD, lightbeam 50 meter flood
Atex Zone 0
ITS 14 ATEX 28062; II 1G Ex ia IIA T4 Ga; II 2G Ex ib IIB T4 Gb
Dimensions 6.85x6.09 cm, weight 156 gram
LED, lifetime 50.00 hour
For 3 x AAA Battery Alkaline (no 770414)
Runtime high 8 hour, low 50 hour.
Watertight IP-X4, impact resistant up to 2 meter



Number	Description
900730	Septor Haz-Lo hoofdlamp LED

Hoofdlamp Streamlight Protac HL LED

540 lumen, 7.400 CD, lightbeam 172 meter
Dimension 3x2.5x6.6 cm, weight 187 gram
LED, lifetime 50.00 hour
2x Lithium battery CR123A
Runtime high 1.75 hour, medium 8 hour, low 36 hour.
Watertight IP-X4, impact resistant up to 1 meter



Number	Description
900729	Protac HL LED

Headlamp Streamlight Trident HP

Unbreakable polycarbonate lens
Plastic housing, dimension 4,72 x 6,42 cm, 132 gram
High power LED + 3 pieces Ultrabright LED's (white)
8 Lumen, 4.000 CD, lightbeam 126 meter
For 3 x Alkaline batteries AAA (no 770414)
Runtime high 5 hour, medium 10 hour, low 53 hour.
IP-4X watertight



Number	Description
900731	Trident C4 Headlamp LED

Hoofdlamp Streamlight HAZ-LO

120 lumen, 6.800 CD, lightbeam 165 meter
HAZ-Lo Zone 0
FTZU 11 ATEX 0052X II 1 G Ex ia IIC T3 Ga
Dimension 7,8x4,8 cm, weight 202 gram
LED, lifetime 50.00 hour
3 x AA Batteries Alkaline
Battery run-time 11 hour
Watertight IP4



Number	Description
900373	HAZ-LO headlamp LED



[Top](#)

Headlamp Streamlight TRIDENT HAZ-LO

85 lumen, 2.600 CD, lightbeam 102 meter
HAZ-Lo Zone 0

ITS 14 ATEX 28062; II 1G Ex ia IIA T4 Ga; II 2G Ex ib IIB T4 Gb

Dimension 6,85x4,45 cm, weight 156 gram

C4 LED spot and 3 LEDs flood

For 3 x AAA alkaline Battery

Runtime high 8 hour, low 24 hour.

IP-4X watertight



Number	Description
900374	Trident HAZ-LO headdlamp LED

Headlamp KSE 7610, Zone 1

65 lumen

LED light source, lifetime 40.000 hour

Rechargeable, Li-Ion battery 3,7V 2800mah, charge time 7 hour.

Charge voltage 100-240V

Dimension 5,5 x 6,5 cm, weight 130 gram.

Battery run-time low: 14 hour, high: 5 hour

Rechargeable ca 500 cycles.

Ex ATEX keur: II 2 G Ex ib T4 IBEx U07 ATEX 1090

Available with many type of safety helmed connections such as:

F110, DIN-helmed, Gallet CGF, Auer-G-F1, Dräger,

HPS6200 / HPS4100 (CEAG-clip)

Also available with blue, yellow or red signalled.



Number	Description
900880	Headlamp KSE 7610 Zone 1 Supplied without helmet strap
900881	KSE Battery charge station for 8 lamps
900882	KS 5525 Helmet strap For connection KSE 7610 on safety helmet



NightSearcher Pulsar

Safety signalling lamps in casing.

Set of 5 pieces, total weight 2700 gram

Charge in case, charge power 12-230V

Watertight IP67 till 10 meter, very strong LED

Charging time 12-14/2-6 hour

Battery run-time between 15 en 60 hour.

Batteries Li-Ion 3,7V, 700 mAh

Orange and with white flashlight modus


Number	Description
900982	Set Orange



[Top](#)

Number	Description
--------	-------------

- | | |
|--------|--|
| 900110 | Mini Maglite in case incl. 2 AA batteries |
| 900130 | Spare krypton lamp for Mini Maglite |

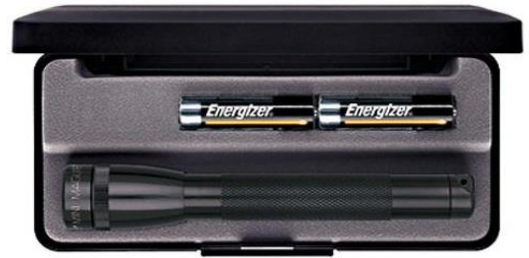

Standard Mag-Lite flashlights

Number	Description
--------	-------------

- | | |
|--------|------------------------------------|
| 900274 | Mag-Lite S2D 2 D cell 26 cm |
| 900275 | Mag-Lite S3D 3 D cell 32 cm |
| 900276 | Mag-Lite S4D 4 D cell 38 cm |
| 900277 | Mag-Lite S5D 5 D cell 44 cm |



- | | |
|--------|--------------------------------------|
| 900278 | Mag-Lite S2C 2 C cell 22,5 cm |
| 900279 | Mag-Lite S3C 3 C cell 27,5 cm |
| 900280 | Mag-Lite S4C 4 C cell 32,5 cm |
| 900281 | Mag-Lite S5C 5 C cell 37,5 cm |



Extreme powerful Mag-Lite LED flashlights with 3 Watt LED module

Number	Description
--------	-------------

- | | |
|--------|-----------------|
| 900310 | Mag-Lite LED 2D |
| 900311 | Mag-Lite LED 3D |
| 900312 | Mag-Lite LED 4D |



- | | |
|--------|---|
| 900308 | Traffic cone red ASX078
Fits on the head of the Mag-Lite C & D cell
and Mag-Charger |
|--------|---|



Rechargeable Mag-Lite the Mag-Charger

Number	Description
--------	-------------

- | | |
|--------|---|
| 900300 | Mag-Charger battery halogen flashlight
NiMh battery
Charger 230V + 12V
Length 320 mm
Anodized aluminium
Halogen bulb 6.0V 8.4 watt.
Spare bulb in the cap of the battery holder. |
|--------|---|



Number	Description
--------	-------------

- | | |
|---------|--|
| 900299 | Accu pack Mag-Charger 6,0V 3500 mA
NEW TYPE |
| 900298 | Accu pack Mag-Charger 6,0V 3500 mA
OLD TYPE |
| 900300L | Spare bulb Mag-Charger
6.0V 8.4W |
| 900300C | Replacement charger 230V |
| 900300D | Replacement charge holder with mounting plate |
| 900300E | Charge adapter 230/12V |



900302	Mag-Charger accu LED lamp 680 lumen NiMh battery Charger 230V + 12V Length 325 mm Anodized aluminium Multibeam lightswitch for 5 beams Adjustble focus. Shockproof and waterproof
--------	--

LED LENSER®

LED Lenser® K2

Length 52mm, weight 20 gram
25 lumen, lightbeam 20 meter
4 x AG13 (LR44) batteries (1.5V) (no. 330200)
Runtime 6 hour.
Watertight IPX7

Number	Description
--------	-------------

90L1001	LED LENSER® K2
---------	----------------

LED Lenser® P7QC

Cree LED light source
Length 132,3mm, weight 175 gram
40/220 lumen, lightbeam 20/60 meter
Incl. 4x AAA alkaline batteries (no. 770414)
Runtime 3/20 uur.
Watertight IPX7

Number	Description
--------	-------------

90L1030	LED LENSER® P7QC
---------	------------------

LED Lenser® X7R

High End Power LED light source
X-Lens technology
Length 171mm, weight 241 gram
500 lumen, lightbeam 320 meter
Incl. 1x Li-Ion battery 3.7V
Runtime 7.5 uur.
Watertight IPX4

Number	Description
--------	-------------

90L1036	LED LENSER® X7R
---------	-----------------

LED Lenser® X21.2

7x Extreme Power LED light source
Length 397mm, weight 1.400 gram
250/1.600 lumen, lightbeam 250/600 meter
For 4x D-Cell alkaline battery (no. 770410)
Runtime 20/100 hour
Smart Light Technology SLT3
Extreme concentrated searchlight function
Watertight IPX4

Number	Description
--------	-------------

90L1037	LED LENSER® X21.2
---------	-------------------

LED Lenser® X21R.2

7x Extreme Power LED light source
Length 405mm, weight 1.300 gram
200/3.200 lumen, lightbeam 150/700 meter
Incl. rechargeable safety Ytrion cell (Li-FePo4)
Runtime 3/40 uur, charge time 3.5 uur.
Smart Light Technology SLT8 Pro
Watertight IPX4

Number	Description
--------	-------------

90L1038	LED LENSER® X21R.2
---------	--------------------

LED LENSER® 



[Top](#)

LED Lenser® H7.2

Ergonomic headlamp
High End Power LED light source
Weight 165 gram
Operation temperature -20°C to +50°C
200/250 lumen, lightbeam 160 meter
For 4x AAA alkaline batteries (no. 770414)
Runtime 12/60 uur
Smart Light Technology SLT2
Watertight IPX4



Number	Description
--------	-------------

90L1100	LED LENSER® H7.2
---------	------------------

LED Lenser® H7R.2

Ergonomic headlamp
Xtreme Power LED lichtbron
Weight 165 gram
Operation temperature -20°C to +50°C
200/300 lumen, lightbeam 160 meter
Incl. Li-Ion battery, charge time 5 hour.
Runtime 14/60 hour
Display with status of charging.
Smart Light Technology SLT2
Watertight IPX4



Number	Description
--------	-------------

90L1101	LED LENSER® H7R.2
---------	-------------------



LED Lenser® H14.2

Ergonomic headlamp
Xtreme Power LED lichtbron
Weight 340 gram
Operation temperature -20°C to +50°C
60/250/350 lumen, lightbeam 230/260 meter
For 4x AA alkaline batteries (no. 770412)
Runtime 15/60 hour
Smart Light Technology SLT2
Watertight IPX4

Number	Description
--------	-------------

90L1102	LED LENSER® H14.2
---------	-------------------



LED Lenser® H14R.2

Ergonomic headlamp
Xtreme Power LED lichtbron
Weight 340 gram
Operation temperature -20°C to +50°C
60/350/850 lumen, lightbeam 200/300 meter
4x Li-Ion battery, charger and USB charger, charge time 8 hour.
Runtime 10/40 hour
Display with status of charging.
Smart Light Technology SLT2
Watertight IPX4

Number	Description
--------	-------------

90L1103	LED LENSER® H14.R2
---------	--------------------



Bright Star 2618

Unbreakable Tuflexx lens and facet reflector.
50 lumen, 1407 CD, lightbeam 75 meter
For 2x D-cell alkaline (no. 770410)



Number	Description
--------	-------------

900101	Bright Star 2618
--------	-------------------------

Yellow housing

900101ML	Bright Star 2618ML
----------	---------------------------

Same as above but with powerful magnet

Bright Star Division 1 Worksafe (orange)
For Atex environments

See overview for applications

Number	Description
--------	-------------

900103	Bright Star 2117
--------	-------------------------

For 2x D-Cell alkaline (no 770410)

900104	Bright Star 2124
--------	-------------------------

For 3x D-Cell alkaline (no 770410)



Bright Star Division 1 Worksafe (orange)
For Atex environments

Waterproof

Number	Description
--------	-------------

900105	Bright Star 2217
--------	-------------------------

For 2x D-Cell alkaline (no 770410)

900106	Bright Star 2224
--------	-------------------------

For 3x D-Cell alkaline (no 770410)



Number	Description
--------	-------------

900120	Bright Star 2206
--------	-------------------------

For 1x Block battery 6V (no. 770141)
Krypton light source



Number	Description
--------	-------------

900107	Bright Star 2206 LED
--------	-----------------------------

For 4x D-Cell alkaline (no 770410)
Holder for 4 D-cell included.
90 lumen, 24650 CD lightbeam 314 meter
1 meter watertight

Number	Description
--------	-------------

900108	Bright Star 2217 LED ZONE 1
--------	------------------------------------

For 2x D-Cell alkaline (no 770410)
1 meter watertight
50 lumen, 1946 CD, lightbeam 88 meter

900108B	Bright Star 2217 LED ZONE 0
---------	------------------------------------

For 2x D-Cell alkaline
(no 770410)
1 meter watertight
50 lumen, 1946 CD,
lightbeam 88 meter



UL Protection Methods Intrinsically Safe Class I, II, Div 1 Groups A-G Class I, II, Div 2 Groups A-G

Model Number	UL Underwriter Laboratories Division 1				cUL Canadian US Listing Division 1			UL Canadian US Listing Standards Association		
	Class I Group C	Class I Group D	Class II Group G	Class III	Class I Group C	Class I Group D	Class II Group G	Class I Group C	Class I Group D	Class II Group G
2106	*	*			*	*		*	*	*
2117	*	*	*	*	*	*	*	*	*	*
2124	*	*	*	*	*	*	*	*	*	*
2217	*	*	*	*	*	*	*	*	*	*
2224	*	*	*	*	*	*	*	*	*	*
2206	*	*	*	*	*	*	*	*	*	*
2208		*						*	*	*

[Top](#)

Pelican flashlights

Peli-Sabrelite 2000

Length 198mm, weight 360 gram
Xenon light source
53 lumen, 6.234 CD, lightbeam 158 meter
For 3x alkaline battery C-Cell (no 770411)
Certificates CI, D1, CII, D2
Watertight IPX7
Runtime 5 hour

Number	Description
900PEL3020	Peli SabreLite 2000



Peli 2300 MityLite

Length 143mm, weight 50 gram
Xenon light source
11 lumen, 478 CD, lightbeam 43 meter
For 2x alkaline battery AA included.
Certificates CI, D1, CII, D2
Watertight IPX7
Runtime 4,5 hour

Number	Description
900410	Peli MityLite 2300



Peli 1900 MityLite

Length 104mm, weight 50 gram
Xenon light source
11 lumen, 571 CD, lightbeam 45 meter
For 2x alkaline battery AAA included.
Certificates: C1,D1 Ex ib e IIC T4 IP67 IEC ex TSA 06.0021X
Watertight IPX7
Runtime 1,5 hour

Number	Description
900PEL3050	Peli MityLite 1900



Peli StealthLite 2400

Length 165mm, weight 200 gram
Xenon light source
45 lumen, 3.934 CD, lightbeam 125 meter
For 4x alkaline battery AA included.
Certificates CI, D1, CII, D2
Watertight IPX7
Runtime 3 hour and 45 minutes

Number	Description
900PEL3061	Peli StealthLite 2400



Peli StealthLite 2410 LED

Length 178mm, weight 200 gram
LED light source
126 lumen, 6.500 CD, lightbeam 161 meter
For 4x alkaline battery AA included.
Certificates CI, D1, CII, D2
Watertight IPX7
Runtime 7,5 hour

Number	Description
900PEL3062	Peli StealthLite 2410 LED



Peli StealthLite 2460 LED

Length 178mm, weight 200 gram
LED light source
183 lumen, 8.050 CD, lightbeam 179 meter
Rechareable incl. NiMh battery
Certificates CI, D1, CII, D2
Watertight IPX7
Runtime 4,5 hour



Number	Description
900PEL3063	Peli StealthLite 2460 LED

Headlamp Peli Headsup Lite 2720

Length 55mm, weight 110 gram
LED light source
80/5 lumen, 790/60 CD, lightbeam 56/15 meter
For 3x AAA batteries, included.
Certificates, NA
Watertight IPX4
Runtime 8/175 hour
Activation Control swich switch on and of the lamp with a hand wave. Night Vision Red Light. Red SOS emergency light.
4x Optic adjustment, lightbeam adjustable from 10% to 100% light output.



Number	Description
900PEL3070	Peli Headsup Lite 2720



Number	Description
770396	SONCA Wonder zaklamp Including battery 3LR12 4,5 Volt Several colors available Packing unit is 12 pieces

Osram Saverlight

Bright LED
12 Red warning LED's on the side.
Emergency hammer, belt cutter and magnet
2 x AA Battery Alkaline

Number	Description
900801	Osram Saverlight Led



[Top](#)

Headlamp Petzl Tikka Plus

High Output LED
5 lumen, lightbeam max 35 meter
Maximum battery runtime high 55 hour,
low 140 hour. Weight 83 gram
IP-X4
3 x AAA Alkaline batteries



Number	Description
900391	Petzl Tikka Plus LED

Headlamp Petzl Pixa 3

2 pieces High output power LED's
Lightbeam 55 meter / 55 lumen
Max. runtime battery high hour, medium 6 hour, low 3 hour
Atex Zone 2/22 Hazloc Class 1 div 2, Class II div 2
Lamphead 90° adjustable. IP67
2 x AA alkaline batteries



Number	Description
900391B	Petzl Pixa 3

Headlamp Petzl Pixa 2

One High output power LED
Lightbeam 30 meter / 40 lumen
Max. runtime batteries high 12 hour, low 6 hour
Atex Zone 2/22 Hazloc Class 1 div 2, Class II div 2
Lamphead 90° adjustable. IP67
2 x AA alkaline batteries



Number	Description
900391C	Petzl Pixa 2