

Floodlight Faerber Tiger 230/250V 50Hz

Polyester coated aluminium RAL 9006 IP66
 Safety glass with silicone seal. Polyamide PG 13,5 gland
 Available with symmetric and a-symmetric reflector (40°)
 For industrial applications, port areas, buildings etc.
 Supplied in the color grey.

Number	Description	Reflector
892000	1 x E40 for halogen tube	Symmetric
892001	1 x E40 150W Son-T / RNP-T	Symmetric
892002	1 x E40 250W Son-T / RNP-T	Symmetric
892003	1 x E40 400W Son-T / RNP-T	Symmetric
892004	1 x E40 250W HPI-T / HRI-T	Symmetric
892005	1 x E40 400W HPI-T / HRI-T	Symmetric
892020	1 x E40 for halogen tube	A-Symmetric
892021	1 x E40 150W Son-T / RNP-T	A-Symmetric
892022	1 x E40 250W Son-T / RNP-T	A-Symmetric
892023	1 x E40 400W Son-T / RNP-T	A-Symmetric
892024	1 x E40 250W HPI-T / HRI-T	A-Symmetric
892025	1 x E40 400W HPI-T / HRI-T	A-Symmetric



Floodlights Faerber Mini Tiger 70 Watt 230/250V 50Hz

Polyester Coated aluminium RAL 9006 IP66
 Safety glass with silicone seal. Polyamide PG 13,5 gland
 Available with symmetric and a-symmetric reflector (10°)

Number	Description	Reflector
892040	1 x Rx7S 70W MHN-TD / HRI-TS	Symmetric
892041	1 x Rx7S 70W MHN-TD / HRI-TS	A-Symmetric

Floodlights Faerber Mini Tiger 150 Watt 230/250V 50Hz

Polyester Coated aluminium RAL 9006 IP66
 Safety glass with silicone seal. Polyamide PG 13,5 gland
 Available with symmetric and a-symmetric reflector (30°)

Number	Description	Reflector
892045	1 x Rx7S 150W MHN-TD / HRI-TS	Symmetric
892046	1 x Rx7S 150W MHN-TD / HRI-TS	A-Symmetric



Light bulbs brand Radium to be order Separate.



Floodlights SBP 5STARS 1000

High performance floodlights for inside- and outside use, like illumination of sports facilities, industrial areas, port areas, buildings etc.

For power supply a ballast box is required (ballastbox and condenser) must be ordered separately.

Housing is made of aluminium and grey painted. Available reflectors are Symetric with a medium (M) and a narrow (INT) light beam, made of polished and anodized high quality pure aluminium.

Lampholder and electrical connections are made out of plyamide (ignitor is mounted in the electrical connection) Patented anti-vacuum IP66 housing.

Lossless safetyglass of 5mm thickness. Gasket made of two-component silicone foam is with CNC technology directly added to the safetyglass. Lossless clips made of anodized aluminium + stainless steel spring for locking the window glass. Mounting bracket of grey aluminium colored steel with a safe security mounting system.

Degree distribution for aiming the right degree of the floodlights lightbeam.


Number	Description	Reflector
893100	SBP 5STARS 1000W E40 / HPI-T	Symetric M
893101	SBP 5STARS 1000W E40 / HPI-T	Sysmetric INT
893102	SBP 5STARS 600 - 1000W E40	Symetric M
893103	SBP 5STARS 600 - 1000W E40	Symetric INT

Number	Description	Reflector
893105	SBP 5STARS 1000W E40 / HPI-T	A-Symetric M
893106	SBP 5STARS 1000W E40 / HPI-T	A-Sysmetric INT
893107	SBP 5STARS 600 - 1000W E40	A-Symetric M
893108	SBP 5STARS 600 - 1000W E40	A-Symetric INT

893020	Ballastbox Alu 600W NAV compesated
893021	Ballastbox Alu 1000W HQI/NAV compensated

893110	A0210 Protective grille of zinc plated steel wire (18joule)
893111	A0208 External anti-glare of grey painted steel
893112	A0209 Hood of grey painted aluminium
893113	A0249 Optional frosted glass
893114	A0282 Optional frosted glass to be order at the with the floodlight
893115	A0211/1 Pole bracket single lamp for size ø60+75mm
893116	A0211/2 Pole bracket double lamp for size ø60+75mm
893117	A0031 Wall bracket 1m made of steel plate
893118	A0290 Bracket reinforcement for mounting fixture with one M14 bolt in the middle of the bracket
893119	A0371/S Bracket of steel wire

To be recommend on places with a lot of vibration.

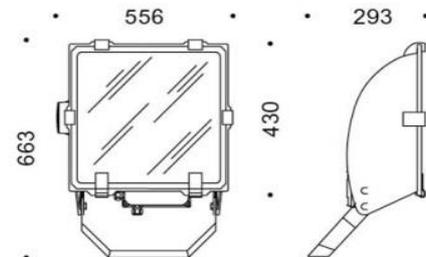

Light bulbs brand Radium to be order Separate.