

Gland Packing materials
Packing materials

Greased sterntube packing

High quality plaited packing manufactured from hemp with grease lubricant.
 Construction: Lattice braided.
 Application: Marine and hydraulics.
 Maximum temperature: 120°C
 Pressure: 80 bar
 Shaft speed: 5 m/sec
 PH: 6-9

Number	Dimension	Length
21PHE431030	3 mm	2 mtr
21PHE431040	4 mm	2 mtr
21PHE431050	5 mm	2 mtr
21PHE431065	6,5 mm	2 mtr
21PHE431080	8,0 mm	2 mtr
21PHE431095	9,5 mm	2 mtr
21PHE431110	11 mm	2 mtr
21PHE431145	14,5 mm	2 mtr
21PHE431160	16 mm	2 mtr
21PHE431190	19 mm	2 mtr
21PHE431220	22 mm	2 mtr
21PHE431250	25 mm	2 mtr



Aramide Fibre packing with PTFE

High strength aramide fibres and impregnated with PTFE dispersion and high temperature lubricant.
 Construction: Lattice braided.
 Fluids suitable: water.
 Application: Pumps particalarly suitable where abrasives are present such as slurry.
 Temperature range: -100°C - up to +280°C.
 Pressure: 30-200 bar.
 Shaft speed: 2-25 m/sec
 PH: 2-13

Number	Dimension	Length
21PHE432065	6,5 mm	2 mtr
21PHE432080	8 mm	2 mtr
21PHE432095	9,5 mm	2 mtr
21PHE432110	11 mm	2 mtr
21PHE432125	12,5 mm	2 mtr
21PHE432145	14,5 mm	2 mtr
21PHE432160	16 mm	2 mtr
21PHE432190	19 mm	2 mtr
21PHE432225	25 mm	2 mtr



Pure PTFE packing

Soft flexible packing constructed by square braiding pure PTFE yarn.
 Construction: Lattice braided.
 Fluids suitable: Concentrated acids.
 Application: High-concentrated strongly aggressive and oxidative chemical products.
 Maximum temperature: +280°C
 Pressure: 20-200 bar
 Shaft speed: 2-8 m/sec
 PH: 0-14

Number	Dimension	Length
21PHE437030	3 mm	2 mtr
21PHE437050	5 mm	2 mtr
21PHE437065	6,5 mm	2 mtr
21PHE437080	8 mm	2 mtr
21PHE437095	9,5 mm	2 mtr
21PHE437125	12,5 mm	2 mtr



Universal packing with PTFE

Fibre glass yarns impregnated with PTFE dispersion and high quality oil.
Construction: Lattice braided.
Fluids suitable: Medium index acids.
Application: Stuffing boxes on rotary.
Maximum temperature: +260°C
Pressure: 50-140 bar
Shaft speed: 2-12 m/sec PH: 2-12

Number	Dimension	Length
21PMA025030	3 mm	2 mtr
21PMA025050	5 mm	2 mtr
21PMA025065	6,5 mm	2 mtr
21PMA025080	8 mm	2 mtr
21PMA025095	9,5 mm	2 mtr
21PMA025110	11 mm	2 mtr
21PMA025125	12,5 mm	2 mtr
21PMA025145	14,5 mm	2 mtr
21PMA025160	16 mm	2 mtr
21PMA025190	19 mm	2 mtr
21PMA025220	22 mm	2 mtr
21PMA025250	25 mm	2 mtr



Universal Graphited packing

Constructed by braiding carbon fibre yarns, a corrosion inhibitor system and sacrificial metal are included.
Construction: Lattice braided.
Fluids suitable: Corrosive fluids except strong oxidizer acids.
Application: Various kinds of high performance pumps and valves.
Corrosive chemicals and petrochemical industry.
Maximum temperature: +650°C
Pressure: 30-250 bar
Shaft speed: 2-20 m/sec PH: 0-14

Number	Dimension	Length
21PMA305030	3 mm	2 mtr
21PMA305050	5 mm	2 mtr
21PMA305065	6,5 mm	2 mtr
21PMA305080	8 mm	2 mtr
21PMA305095	9,5 mm	2 mtr
21PMA305110	11 mm	2 mtr
21PMA305125	12,5 mm	2 mtr
21PMA305145	14,5 mm	2 mtr
21PMA305160	16 mm	2 mtr
21PMA305190	19 mm	2 mtr
21PMA305220	22 mm	2 mtr
21PMA305250	25 mm	2 mtr



Ramie packing

High quality plaited packing manufactured from lubricated flax yarn.
Construction: Lattice braided.
Fluids suitable: Sludges.
Heavy duty applications including reciprocating and rotary machinery.
Maximum temperature: +150°C
Pressure: 80 bar
Shaft speed: 5 m/sec
PH: 5-10

Number	Dimension	Length
21PMA044050	5 mm	2 mtr
21PMA044065	6,5 mm	2 mtr
21PMA044080	8 mm	2 mtr
21PMA044095	9,5 mm	2 mtr
21PMA044110	11 mm	2 mtr
21PMA044125	12,5 mm	2 mtr
21PMA044140	14 mm	2 mtr
21PMA044160	16 mm	2 mtr
21PMA044190	19 mm	2 mtr
21PMA044220	22 mm	2 mtr



Graphited Steam packing

Fibreglass yarns impregnated with graphite PTFE dispersion & mineral oil and than graphite.

Construction: Lattice braided.

Fluids suitable: Water.

Application: Rotary shafts.


Maximum temperature: -85°C up to +480°C

Pressure: 20-150 bar

Toerental: 1,5-4 m/sec

PH: 4-10

Number	Dimension	Length
21PMA022030	3 mm	2 mtr
21PMA022040	5 mm	2 mtr
21PMA022065	6,5 mm	2 mtr
21PMA022080	8 mm	2 mtr
21PMA022095	9,5 mm	2 mtr
21PMA022110	11 mm	2 mtr
21PMA022125	12,5 mm	2 mtr
21PMA022145	14,5 mm	2 mtr
21PMA022160	16 mm	2 mtr
21PMA022190	19 mm	2 mtr
21PMA022220	22 mm	2 mtr
21PMA022250	25 mm	2 mtr

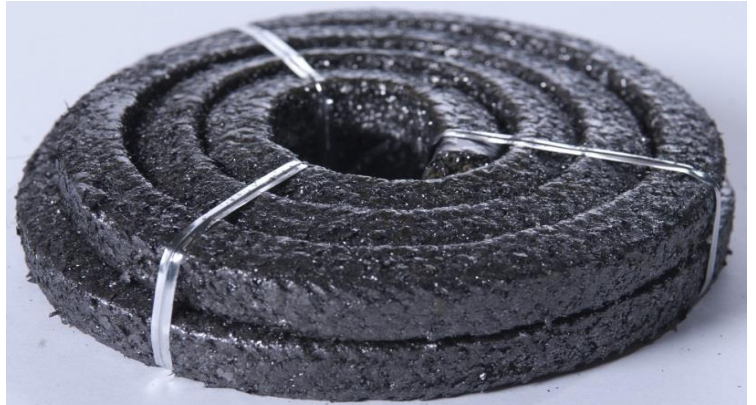

Graphite tape

For high temperatures and high pressures

Application: for valves

Maximum temperature: -240°C up to +400°C

For water, steam, oil, solvents, thermal heating oil etc.

Number	Dimension	Length
21PMA480010	0,38 x 10 mm	15 mtr
21PMA480015	0,38 x 15 mm	15 mtr
21PMA480020	0,38 x 20 mm	15 mtr

