

KIRA Leuchten Hand Lamp KE-3010-LED IP68

Kira Leuchten GmbH type KE-3010-LED Hand Lamp IP68 DUST & WATERPROOF TUBE LIGHT 24V



Discover the KE-LED 3010-P LED hand lamp - an outstanding light source with a slim and compact design that still offers extreme light intensity. This hand lamp was developed to meet the highest requirements for brightness, protection and flexibility.

Dust and waterproof thanks to IP68 protection class:

With its IP68 protection class, the KE-LED 3010-P work light is dust and waterproof. These properties make them perfect for demanding tasks such as tank and barrel cleaning work as well as work in damp and wet environments. The LED hand lamp is designed to provide you with reliable, glare-free light in various work environments. Electronic silicone encapsulated.

Safe Working:

The KE-LED 3010-P flashlight is available with a voltage of 24 volts, which offers additional protection, especially when working in narrow containers. If necessary, appropriate SELV transformers (230V-24V) can be purchased as accessories to ensure optimal power supply.



Robust and impact-resistant:

The prism polycarbonate protective tube of this inspection light not only provides a glare-free work light, but also offers robustness and impact resistance. The light is designed to ensure clear visibility and optimal working conditions even under challenging conditions. The additional kink protection cable gland is a practical feature that offers reliable bending protection. This not only helps protect the cable, but also ensures the long-term functional reliability of the light.

Supply line can be individually adjusted:


The standard equipment of the KE-LED 3010-P includes a 10m supply cable in H07RN-F specification, which is also optionally available as H07BQ-F. It is also possible to adjust the cable length according to individual requirements. This flexibility allows you to optimally integrate the hand lamp into your work environment.

Tackle your tasks with maximum brightness, flexibility and reliability.

Trust the KE-LED 3010-P to provide optimal lighting in any environment and situation.

Typical applications:


- Heavy Industry and Shipyards
- Maritime and Offshore
- Tank Cleaning
- Car & Truck Repair Service

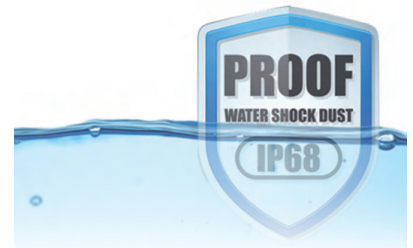

Technical specifications:

Nominal voltage: 24 V ac/dc
Current: 0,215 A
IP Protection Class: IP68 50m / 5h
Impact Resistance: IK10
Protection Class: Class III
Weight: Approx. 1,35 kg
Tamb: -20°C - +50°C
Number of LED's: 10
Lifetime LED: >50.000h
Light colour: 6.500K
Colour rendering: >70
Diffuser: Integrated diffuser film
Protective tube: Polycarbonate IK10
End Caps & handle : PVC
Hook: Metal rotatable
Cable: 10 mtr H07RN-F 2x1,5 mm²
Cable type optional: H07BQ-F
Plug: OPTIONAL
MADE IN GERMANY

Dimensions:



a - b - c - d - e - f - g - h (in mm)

40 - 55 - 175 - 120 - 20 - 50 - 30 - 410

Hexagonal handle and end cap prevent the lamp rolling away from awork bench. With cable kink protection.



Article numbers H07RN-F cable:

Article No.	Description	Voltage	Colour	Wattage	Lumen	Current
89KRL131532	KE-3010-LED with 10m cable H07RN-F 2x1,5 mm² w/o plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A
89KRL131532C	KE-3010-LED with 10m cable H07RN-F 2x1,5 mm² with CEE plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A
89KRL131381	KE-3010-LED with 15m cable H07RN-F 2x1,5 mm² w/o plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A
89KRL131381C	KE-3010LED with 15m cable H07RN-F 2x1,5 mm² with CEE plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A
89KRL131566	KE-3010-LED with 20m cable H07RN-F 2x1,5 mm² w/o plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A
89KRL131566C	KE-3010-LED with 20m cable H07RN-F 2x1,5 mm² with CEE plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A

Article numbers H07BQ-F cable:

There are multiple KIRA SELV safety transformers available.

Article No.	Description	Voltage	Colour	Wattage	Lumen	Current
89KRL131832	KE-3010-LED with 10m cable H07BQ-F 2x1,5 mm² w/o plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A
89KRL131832C	KE-3010-LED with 10m cable H07BQ-F 2x1,5 mm² with CEE plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A
89KRL131539	KE-3010-LED with 15m cable H07BQ-F 2x1,5 mm² w/o plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A
89KRL131539C	KE-3010-LED with 15m cable H07BQ-F 2x1,5 mm² with CEE plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A
89KRL131571	KE-3010-LED with 20m cable H07BQ-F 2x1,5 mm² w/o plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A
89KRL131571C	KE-3010-LED with 20m cable H07BQ-F 2x1,5 mm² with CEE plug	24 V AC/DC	6.500K	6,0 W	580 lm	0,215 A