

KIRA Leuchten Hand Lamp KE-5024-LED IP68

Kira Leuchten GmbH type KE-5024-LED Hand Lamp IP68
DUST & WATERPROOF TUBE LIGHT 24V



KE-LED 5024-P LED hand light - the ultimate work light with 24 POWER LEDs that stands for extreme light intensity and outstanding performance. This hand lamp was developed to meet the highest requirements in terms of brightness, protection and versatility.

Extremely bright:

The KE-LED 5024-P is equipped with an impressive 24 POWER LEDs, making it an extremely bright hand lamp on the market. This performance makes them the ideal solution for cleaning work on and in large containers as well as for use in damp and wet environments. No matter what challenges you face, this hand lamp provides constant and reliable lighting.

Robust and resistant:

With the IP68 protection class, the KE-LED 5024-P is dust and waterproof. In conjunction with the polycarbonate protective tube, this makes it particularly robust and resistant. These properties make them an indispensable companion for cleaning work and in demanding environments where reliability is crucial. Electronic silicone encapsulated.



Safety thanks to protective extra-low voltage:


The wired KE-LED 5024-P work light is available with a voltage of 24 volts (safety extra-low voltage), which offers additional protection, especially when working in containers (such as tank, silo and barrel cleaning). If required, appropriate SELV transformers (230V-24V) are available as accessories to ensure optimal power supply.

Supply line can be individually adjusted:

The additional kink protection cable gland provides reliable bending protection and thus contributes to protecting the cable and ensuring long-term functional reliability. The standard equipment of the rod light includes a supply cable in H07RN-F specification, which is also optionally available as H07BQ-F. In addition, the length of the supply line can be individually adjusted upon customer request to enable even more flexible use. Invest in a hand lamp that not only stands for extreme brightness, but also for versatility and reliability. Trust the KE-LED 5024-P to illuminate your work environment with clear, bright light and complete your tasks efficiently.

Typical applications:


- Heavy Industry and Shipyards
- Maritime and Offshore
- Tank Cleaning
- Car & Truck Repair Service

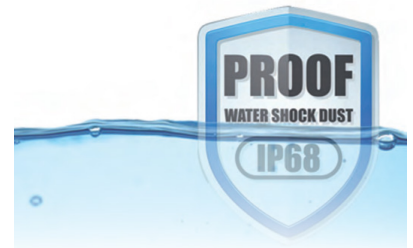

Technical specifications:

Nominal voltage: 24 V ac/dc
Current: 0,550 A
IP Protection Class: IP68 50m / 5h
Impact Resistance: IK10
Protection Class: Class III
Weight: Approx. 2,2 kg
Tamb: -20°C - +40°C
Number of LED's: 24
Lifetime LED: >50.000h
Light colour: 6.500K
Colour rendering: >70
Diffuser: Integrated diffuser film
Protective tube: Polycarbonate IK10
End Caps & handle : Neoprene
Hook: Metal rotatable
Cable: 10 mtr H07RN-F 2x1,5 mm²
Cable type optional: H07BQ-F
Plug: OPTIONAL
MADE IN GERMANY


Dimensions:



a - b - c - d - e - f - g - h - I - J (in mm)

30 - 50 - 30 - 480 - 90 - 130 - 20 - 75 - 50 - 830

Neoprene handle and end cap.
With cable kink protection.

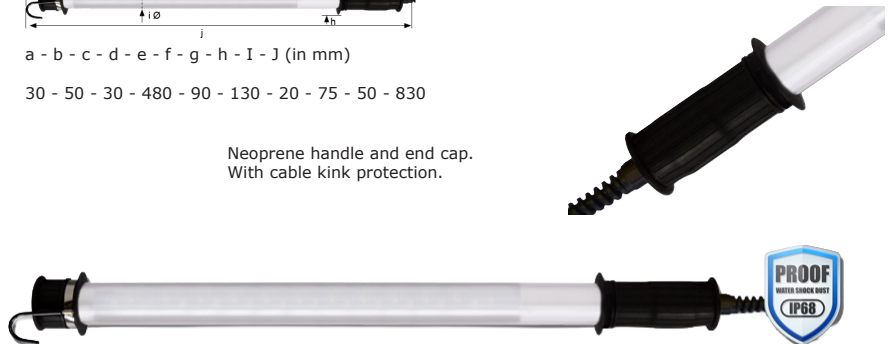

Article numbers H07RN-F cable:

Article No.	Description	Voltage	Colour	Wattage	Lumen	Current
89KRL131521	KE-5024-LED with 10m cable H07RN-F 2x1,5 mm² w/o plug	24 V AC/DC	6.500K	15,5 W	1.650 lm	0,550 A
89KRL131521C	KE-5024-LED with 10m cable H07RN-F 2x1,5 mm² with CEE plug	24 V AC/DC	6.500K	15,5 W	1.650 lm	0,550 A
89KRL131839	KE-5024-LED with 20m cable H07RN-F 2x1,5 mm² w/o plug	24 V AC/DC	6.500K	15,5 W	1.650 lm	0,550 A
89KRL131839C	KE-5024-LED with 20m cable H07RN-F 2x1,5 mm² with CEE plug	24 V AC/DC	6.500K	15,5 W	1.650 lm	0,550 A

Article numbers H07BQ-F cable:

Article No.	Description	Voltage	Colour	Wattage	Lumen	Current
89KRL131840	KE-5024-LED with 10m cable H07BQ-F 2x1,5 mm² w/o plug	24 V AC/DC	6.500K	15,5 W	1.650 lm	0,550 A
89KRL131840C	KE-5024-LED with 10m cable H07BQ-F 2x1,5 mm² with CEE plug	24 V AC/DC	6.500K	15,5 W	1.650 lm	0,550 A
89KRL131841	KE-5024-LED with 20m cable H07BQ-F 2x1,5 mm² w/o plug	24 V AC/DC	6.500K	15,5 W	1.650 lm	0,550 A
89KRL131841C	KE-5024-LED with 20m cable H07BQ-F 2x1,5 mm² with CEE plug	24 V AC/DC	6.500K	15,5 W	1.650 lm	0,550 A

Article No.	Description
89KRL291996	Protective foil, SFO-LED-5024
89KRL290057	Mounting bracket (1 pcs) BFK D50
89KRL290750	Magnetic bracket (1 pcs) KM 50

