


LED Wall light fixture

LED Indoor /outdoor wall light BAMA


BAMA wall light suitable for outdoor lighting with IP54. It incorporates small fins located at the bottom and top of the wall light that regulate the angle of light output, diffusing or accentuating its intensity and creating a pleasant visual effect. Wall light LED of 6W and warm white light color (3000K). Available as a square and a circular version. Housing of aluminium sheet metal with thermo painted coating. Available housing colors, white, black, grey, matt chrome and titanium. All models include a LED driver and LED's. Voltage range 220-240Vac 50/60Hz. Protection IP54. Estimated useful life exceeding 30.000 hours, CRI >80.



| Article No. | Description | Watt | Lumen | CRI | Colour |
|----------------|------------------------------|------|-------|-----|--------|
| 83SEC655010683 | BAMA White 3+3W Square | 6 | 457 | >80 | 3000K |
| 83SEC655020683 | BAMA Black 3+3W Square | 6 | 457 | >80 | 3000K |
| 83SEC655520683 | BAMA Matt Chrome 3+3W Square | 6 | 457 | >80 | 3000K |
| 83SEC655900683 | BAMA Titanium 3+3W Square | 6 | 457 | >80 | 3000K |
| 83SEC655580683 | BAMA Grey 3+3W Square | 6 | 457 | >80 | 3000K |




| Article No. | Description | Watt | Lumen | CRI | Colour |
|----------------|--------------------------------|------|-------|-----|--------|
| 83SEC656010683 | BAMA White 3+3W Circular | 6 | 457 | >80 | 3000K |
| 83SEC656020683 | BAMA Black 3+3W Circular | 6 | 457 | >80 | 3000K |
| 83SEC656520683 | BAMA Matt Chrome 3+3W Circular | 6 | 457 | >80 | 3000K |
| 83SEC656900683 | BAMA Titanium 3+3W Circular | 6 | 457 | >80 | 3000K |
| 83SEC656580683 | BAMA Grey 3+3W Circular | 6 | 457 | >80 | 3000K |

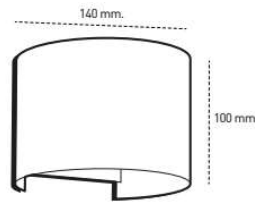



Trevos SB LED Indoor Luminaire

Trevos LED Indoor luminaire IP20

Aluminium indoor LED light fitting intended for surface-mounted installation on the ceiling or on the wall, with diffuser made of translucent acrylate and with built-in switch in side lid. The light fitting is suitable for sanitary facilities, kitchen units, wall units, cloakrooms, work surfaces and shop windows. Power supply Isolated, current driver. Voltage range 220-240Vac 50/60Hz, Mac Adam 3 SDCM. Protection IP20, Rank I. For ambient temperatures max. +35°C. Housing made of aluminium, white powder painted RAL 9003. Diffuser translucent polycarbonate (PC), UV stable and impact resistant. Cable gland of white rubber. Side covers: White plastic (ABS). Connection: Terminal block screwed, three poles. Switch built-in at side cover. LED efficacy **up to 145 lm/w**. Light color standard 4000K (optional 3000K), CRI >80. Factory warranty 5 years. Attachment method: directly to a ceiling or wall with use of screws. Slide mounting spacers (PA GF). The watt and lumen values can, in accordance with valid standards, vary by $\pm 7,5\%$. * = Luminous flux of light fitting. Developed and produced in the Czech Republic.



| Article No. | Description | Watt | Lumen * | Dimensions in mm AxBxC | Mounting spacing in mm D | Light color |
|-------------|-----------------------|------|---------|------------------------|--------------------------|-------------|
| 89TR22415 | SB LED 1.1ft 1100/840 | 9 | 1080 | 360x38x67 | 230 | 4000K |
| 89TR22425 | SB LED 1.2ft 2200/840 | 15 | 2130 | 590x38x67 | 460 | 4000K |
| 89TR22435 | SB LED 1.4ft 4400/840 | 30 | 4250 | 1150x38x67 | 1020 | 4000K |
| 89TR22445 | SB LED 1.5ft 5500/840 | 37 | 5360 | 1430x38x67 | 1300 | 4000K |



LED Indoor wall mounted light fixtures

Wall luminaire DUMBO with flexible arm

Chrome or coated steel body
Build-in LED driver. Independent switch. Voltage range: 230Vac 50/60Hz
Light source Seoul LED, Driver 700 mA - 6V, CRI of >80, power factor 0,5.
Dimensions 390x29x18mm + base 120x60mm. Weight 0,3 kg. Protection IP20.

| Article No. | Description | Watt | Lumen | Color Kelvin |
|-------------|------------------|------|--------|--------------|
| 89MCHO42619 | Dumbo LED Black | 3W | 150 lm | 3000K |
| 89MCHO42620 | Dumbo LED Chrome | 3W | 150 lm | 3000K |



Wall luminaire DUMBO with adjustable arm

Chrome or coated steel body
Build-in LED driver. Independent switch. Voltage range: 230Vac 50/60Hz .
Light source Seoul LED. Driver 700 mA - 6V, CRI of >80, power factor 0,5.
Dimensions 72,5x133x29mm + base 120x60mm. Weight 0,26 kg. Protection IP20.

| Article No. | Description | Watt | Lumen | Color Kelvin |
|-------------|------------------|------|--------|--------------|
| 89MCHO42621 | Dumbo LED Black | 3W | 150 lm | 3000K |
| 89MCHO42622 | Dumbo LED Chrome | 3W | 150 lm | 3000K |



Wall luminaire with flexible arm

Material: steel and plastic available in 3 different colors.
Built-in LED driver. Built-in small switch. Built-in USB charging port.
Light source LED non replaceable.
Voltage range: 220-240V and 50/60Hz with safety class I. Protection IP20.
Non-dimmable light source. Light angle: 110°.
Nominal light output 320 lumen and light color 3000K Warm White. CRI >80
Dimensions: 300x65x160mm.


| Article No. | Description | Watt | Lumen | Color Kelvin |
|-------------|-----------------------------|------|--------|--------------|
| 89EG33452 | Wall light Black | 3,8W | 320 lm | 3.000K |
| 89EG96566 | Wall light White | 3,8W | 320 lm | 3.000K |
| 89EG96567 | Wall light Nickel-mat black | 3,8W | 320 lm | 3.000K |



Wall luminaire ZANTE

Painted aluminium body. Build-in LED driver. Voltage range: 230Vac 50/60Hz.
Light source SMD EDISON LED. LED Driver DC 17-26V - 350 mA.
CRI of >80, power factor 0,7. Dimensions 207x60x126mm WxDxH.
Weight 0,75 kg. Protection IP54. Made in Italy.

| Article No. | Description | Watt | Lumen | Color Kelvin |
|-------------|-----------------|------|--------|--------------|
| 89MCHO40228 | Zante LED White | 10W | 850 lm | 3000K |
| 89MCHO40229 | Zante LED Grey | 10W | 850 lm | 3000K |
| 89MCHO40230 | Zante LED White | 10W | 900 lm | 5000K |
| 89MCHO40231 | Zante LED Grey | 10W | 900 lm | 5000K |

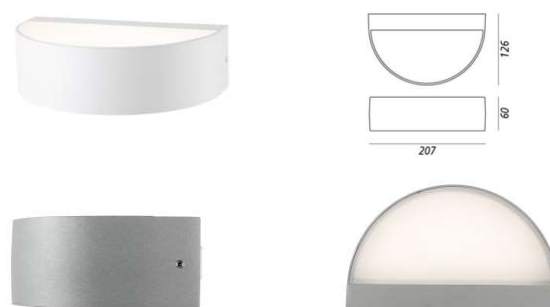

Wall light Spot

Steel body. Voltage range: 220-240Vac 50/60Hz.
Light fitting GU10. LED light source GU10, 4,6W 400 lumen 3.000K included.
CRI of >80, power factor 0,7. Dimensions 70x165mm WxL. With on/off switch.
Weight 0,42 kg. Protection IP20, Class I. Made in Austria.

| Article No. | Description | Watt | Lumen | Color Kelvin |
|-------------|-----------------------|------|--------|--------------|
| 83EGL092084 | LED Spot chrome/white | 4,6W | 400 lm | 3.000K |
| 83EGL030832 | LED Spot Nickel/black | 4,6W | 400 lm | 3.000K |

