

## Marine Grade Tapes

### RAM-NEK Marine Tapes MT201

RAM-NEK MT201 is the perfect hatch cover tape for seagoing vessels. Is a single component, factory extruded 1,22 meter long strip of high-adhesive plastic formed to the proper cross-section between two protective wrappers, one of which is silicon coated for easy stripping (brown paper). The other is non removable clear polypropylene covering which remains in place over the adhesive to allow "foot pressure" on the tape during application. The tape is reinforced with fiberglass mesh. It offers the ultimate protection for water sensitive cargo and provides that extra confidence in protected cargo. It can help protect against the number one cause of cargo damage - leaking covers. Extreme strong, thick 5,0 mm and high quality product.



Article No.	Description	IMPA
94RAM1003	Ram-Nek 3" 75 mm box of 60 strips of 1,22 mtr.	23 24 61
94RAM1005	Ram-Nek 4,3" 110 mm box of 30 strips of 1,22 mtr.	23 24 62
94RAM1006	Ram-Nek 6" 150 mm box of 30 strips of 1,22 mtr.	23 24 63



### MARITAPE Marine Tapes MT212

Is recommended for marine applications where the weather and sea conditions can be moderate and predictable, and only demand a medium strength tape. Makes it possible to acquire reliable, flexible and effective medium duty sealing for the hatch cover. Offers far greater strength than duct tape but does not quite equal the Heavy Duty critical strength as the MT201 Marine Tape. The Tape has a thickness of 40 mills (1,01 mm). From the same manufacturer as Ram-Nek tape

Article No.	Description	IMPA
94RAM1000	Maritape 40 - 4" 100 mm box of 4 rolls of 15,25 mtr.	23 24 56
94RAM1001	Maritape 40 - 6" 150 mm box of 4 rolls of 15,25 mtr.	23 24 57



### Anti-splashing Tape for ship's engine room

For preventing outbreak of a fire caused by a splash of combustible oil, such as fuel oil, lubricating oil, etc. from oil pipes connected to an engine or a generator in a ships engine room. With the tape a flange connection will be covered prevent an oil spray in case of a leaking gasket which can immediately cause fire on a hot engine. Solas approved and BV/ABS/DNV approved.

Article No.	Description	IMPA
97871801	Anti-splashing tape 35 mm x 10 mtr.	87 18 01
97871802	Anti-splashing tape 50 mm x 10 mtr.	87 18 02
97871808	Anti-splashing tape 75 mm x 10 mtr.	87 18 08
97871804	Anti-splashing tape 100 mm x 10 mtr.	87 18 04
97871803	Anti-splashing tape 140 mm x 10 mtr.	87 18 03
97871807	Anti-splashing tape 250 mm x 10 mtr.	87 18 07
97871805	Anti-splashing tape 500 mm x 10 mtr.	87 18 05
97871806	Anti-splashing tape 1000 mm x 10 mtr.	87 18 06



### Anti-Corrosion Tape

For long term protection of metal surfaces that are underground, underwater, or exposed - even in the most severe environment. It consists of a cold applied system of petrolatum based PetroWrap Anti-Corrosion tape, Petrowrap primer and when necessary PetroWrap mastic. PetroWrap adheres to surfaces without heating even on damp and/or indifferently prepared areas. This tapes are also used for anti-corrosion protection of machine parts during transport. Very useful for protection of pipes on deck of seagoing vessels.

Article No.	Description	IMPA
940316P	Petrowrap 50 mm x 10 mtr.	81 24 71
940317P	Petrowrap 100 mm x 10 mtr.	81 24 72
940318P	Petrowrap 150 mm x 10 mtr.	81 24 73
940319P	Petrowrap 200 mm x 10 mtr.	81 24 74



### SOLAS Tape Denfoil

A high adhesive tape, resistant against UV radiation and suitable in harsh sea conditions. For Safety marking of lifeboats, life rafts, lifevests, life buoys and for route marking. Also often used on offshore constructions. SOLAS approved and certified. Steerwheel marking on the tape.

Article No.	Description	IMPA
75DF130265	Denfoil Solas Tape 50mm x 45 mtr.	33 01 89



## Marine Grade Tapes

### Barrier Tapes

Non-adhesive tape for temporary use.  
Perfect to make a temporary barriers for areas which may not be entered.  
Material: Polyethylene.  
Length roll: 500 mtr.

Article No.	Description	IMPA
000294	Barrier tape 80mm x 500 mtr. Yellow/black	33 11 99
000295	Barrier tape 80mm x 500 mtr. Red/white	-



### Denfoil Non-slip Self-adhesive Tapes

For Stair Nosings.  
For Engine Room Ladders.  
For Escape Routes on Deck.  
For Galleys.  
For Factory and Warehouse Floors.  
Easy and fast application.  
**Length roll 18 mtr.**

Article No.	Description	IMPA
75DF130725	Denfoil Non-slip tape 50 mm black	-
75DF130726	Denfoil Non-slip tape 50 mm red	-
75DF130727	Denfoil Non-slip tape 50 mm white	-
75DF130728	Denfoil Non-slip tape 50 mm blue	-
75DF130729	Denfoil Non-slip tape 50 mm yellow	-
75DF130730	Denfoil Non-slip tape 50 mm brown	-
75DF130731	Denfoil Non-slip tape 50 mm green	-
75DF130732	Denfoil Non-slip tape 50 mm grey	-
75DF130733	Denfoil Non-slip tape 50 mm yellow/black	-
75DF130734	Denfoil Non-slip tape 50 mm red/white	-
75DF130737	Denfoil Non-slip tape 50 mm fluorescent	-
75DF130738	Denfoil Non-slip tape 50 mm clear	-
75DF130739	Denfoil Non-slip tape 100 mm black	33 11 81
75DF130735	Denfoil Non-slip tape 50 mm photoluminescent black	-
75DF130736	Denfoil Non-slip tape 50 mm photoluminescent	-



### Denfoil Edge Fix

For closing gaps and making the Non-slip tape even stronger.  
Extra fixation on edges.

Article No.	Description	IMPA
75DF130740	Denfoil Edge Fix tube 140 ml.	-



### Denfoil Floor Marking Self-adhesive Tapes

For floor marking lines and route marking.  
Easy and fast application.  
**Length roll 33 mtr.**

Article No.	Description	IMPA
75DF130700	Denfoil Floor Marking tape 50 mm yellow	-
75DF130701	Denfoil Floor Marking tape 50 mm blue	-
75DF130702	Denfoil Floor Marking tape 50 mm red	-
75DF130703	Denfoil Floor Marking tape 50 mm green	-
75DF130704	Denfoil Floor Marking tape 50 mm white	-
75DF130054	Denfoil Floor Marking tape 50 mm black/yellow	-
75DF130709	Denfoil Floor Marking tape 100 mm black/yellow	-
75DF130059	Denfoil Floor Marking tape 50 mm red/white	-





Many other Marine Tapes on request available. Contact our product specialists.  
Or visit our website:

<https://www.repairmanagement.nl/distributorships/denfoil-maritime/denfoil-tapes/>

### Denfoil Reflective Tapes

For floor marking lines and route marking.  
Easy and fast application.  
**Length roll 10 mtr.**

Article No.	Description	IMPA
75DF130750	Denfoil Reflective tape 50 mm red/white	-
75DF130751	Denfoil Reflective tape 100 mm red/white	-
75DF130755	Denfoil Reflective tape 50 mm black/yellow	33 11 91
75DF130756	Denfoil Reflective tape 100 mm black/yellow	33 11 92

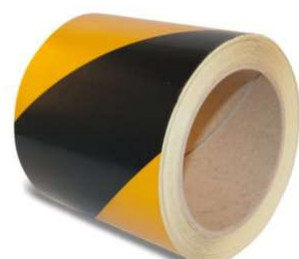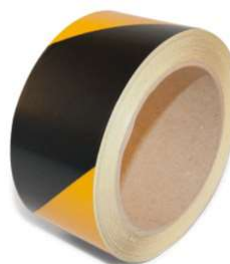

## Marine Grade Tapes

### Denfoil High Intensity Reflective Tapes

For floor marking lines and route marking. For marking of objects  
Easy and fast application.  
**Length roll 45,7 mtr.**

**DENFOILMARITIME**



Article No.	Description	IMPA
75DF130260	Denfoil High Reflective tape 50 mm white	-
75DF130262	Denfoil High Reflective tape 50 mm red	-
75DF130261	Denfoil High Reflective tape 50 mm yellow	-

### Denfoil Photoluminescent Tapes

For highlighting and marking safe areas and exit doors.  
Two color diagonal marking.  
Easy and fast application.  
**Length roll 10 mtr.**




Article No.	Description	IMPA
75DF130018	Denfoil Photoluminescent tape 40 mm green	33 20 34
75DF130006	Denfoil Photoluminescent tape 80 mm green	33 20 38
75DF130015	Denfoil Photoluminescent tape 40 mm black	33 20 44
75DF130003	Denfoil Photoluminescent tape 80 mm black	33 20 48
75DF130016	Denfoil Photoluminescent tape 40 mm red	33 20 54
75DF130004	Denfoil Photoluminescent tape 80 mm red	33 20 58

### Denfoil Low Light Location Tapes

Low location light tapes are used to mark escape routes.  
Minimum Solas requirement is 500 lux.  
Measurement and marking the afterglow pigments  
The Denfoil Low light location tape meets the standard DIN 67510 of 1000 lux.  
150 luminance in mcd/m<sup>2</sup> 10 minutes after end of excitation 20 luminance in mcd/m<sup>2</sup> 60 minutes after end of excitation.  
Easy and fast application.

**Length roll 10 mtr. or strips 1 mtr.**





Article No.	Description	IMPA
75DF130005	Denfoil Photoluminescent tape 80 mm with arrows	-
75DF130001	Denfoil Photoluminescent tape 80 mm without arrows	33 20 16
75DF130002	Denfoil Photoluminescent strip 80 mm without arrows (rigid mounted with double sided tape)	-
75DF130055	Denfoil Photoluminescent Arrows 4 pcs 30 x 80 mm	-
75DF130056	Denfoil Photoluminescent Arrows 4 pcs 50 x 150 mm	-

### Denfoil Vinyl Low Light Location Tapes and Way Finding Tapes

Low location light tapes are used to mark escape routes.  
Marking emergency equipment.  
Handrail and stair identification.  
The tape without print is ready for adding self-adhesive pictograms on it.  
A wide Denfoil range is available.  
Easy and fast application.

**Length roll 10 mtr.**

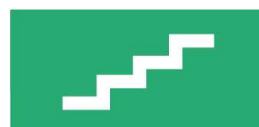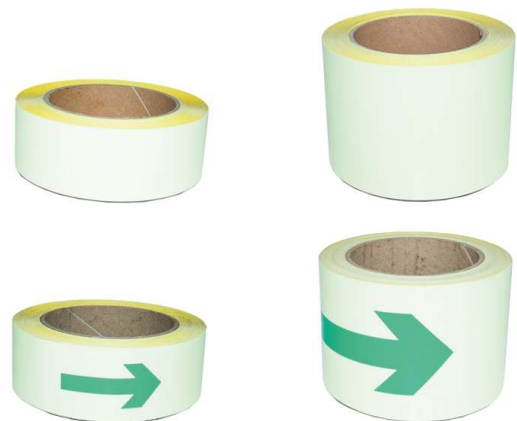

Article No.	Description	IMPA
75DF130014	Denfoil Photoluminescent tape 40 mm without print	33 20 14
75DF130001	Denfoil Photoluminescent tape 80 mm without print	33 20 16
75DF130017	Denfoil Photoluminescent tape 40 mm with arrows MED	-
75DF130005	Denfoil Photoluminescent tape 80 mm with arrows MED	-
75DF130048	Denfoil Muster station arrow left 50x100 mm	33 23 80
75DF130049	Denfoil Muster station arrow right 50x100mm	33 23 81
75DF130034	Denfoil Exit arrow left 50x100mm	33 23 82
75DF130036	Denfoil Exit arrow right 50x100mm	33 23 83
75DF130045	Denfoil Emergency stairs left 50x100mm	33 23 85
75DF130046	Denfoil Emergency stairs right 50x100mm	33 23 84
75DF130057	Denfoil Exit right 150x50mm	33 23 86
75DF130058	Denfoil Exit left 150x50mm	33 23 87



# Marine Grade Tapes

## Denfoil Pipe Marking Tapes

Pipe Marking Tapes are used for identification of the media in the pipe.

Regulations:

14726-1 (1999) details basic marking of piping systems in accordance with the content and/or function on board of ships and marine structures.

ISO 14726-2 (2002) details specific additional colours to be used in conjunction with the main colours ISO 14726-1

Heat resistance -20°C up to +120°C

Easy and fast application.

**Length roll 33 mtr.**

Prior to application, pipes should be dust and oil free. The tape should overlap by at least 20mm on the 'blind side' however on pipes with an external diameter of over 200mm the tape only needs to cover half the circumference of the pipe.

**DENFOILMARITIME**



Article No.	Description	IMPA
75DF130019	Denfoil Pipe Marking Tape Maroon	33 21 45
75DF130020	Denfoil Pipe Marking Tape Yellow-ochre	33 21 51
75DF130021	Denfoil Pipe Marking Tape Violet	33 21 49
75DF130022	Denfoil Pipe Marking Tape Brown	33 21 42
75DF130023	Denfoil Pipe Marking Tape Red	33 21 48
75DF130024	Denfoil Pipe Marking Tape Grey	33 21 44
75DF130025	Denfoil Pipe Marking Tape Black	33 21 40
75DF130026	Denfoil Pipe Marking Tape Blue	33 21 41
75DF130027	Denfoil Pipe Marking Tape Orange	33 21 46
75DF130028	Denfoil Pipe Marking Tape Green	33 21 43
75DF130029	Denfoil Pipe Marking Tape Silver	33 21 47
75DF130030	Denfoil Pipe Marking Tape White	33 21 50
75DF130047	Denfoil Pipe Marking Tape Flow Direction Arrow	33 21 30



## Wencon Pipe Tape

Wencon Pipe Tapes are water activated tapes for emergency repairs on pipes.

Fast curing repair bandage especially formulated to make quick and effective repairs of cracks, leaks, fractures and corrosion porosity in pipes carrying water and other medium which doesn't contain Hydrocarbons or flammable fluids. Good pressure and chemical resistance. Ready for use after soaking 10 seconds in water. After 10 minutes cure the bandage hardens and the pipe can usually be reactivated. Bandage is fully cured within 1 hour. Suitable for pipes up to diameter 300mm.

Maximum service temperature of the pipe +120°C.

Potlife at 20°C 4-6 minutes. Curing time 10-30 minutes (depend on temperature)

In cold condition use handwarm water to speed up the curing process.

Wencon Pipe Tape hold Class Approval from BV, Rina, ABS and DNV-GL.

**Can be used in combination with Wencon Putty (applied under the tape) to get extra strength.**

Wencon Pipe Tape is Pressure Tested by the Danish Force institute and can withstand high pressures in combination with the Putty with internal water pressure up to 240 bar, leakages noted but after releasing the pressure no visible defects were observed on the bandages. Leakages occurred between 155 and 175 bar.

Force Institute Certificate available.



Article No.	Description	IMPA
101044	Wencon Pipe Tape 1044 Box 2 rolls of 10 x 350 cm. (4x140 Inch)	81 23 28
101045	Wencon Pipe Tape 1045 Box of 5 rolls of 5 x 150 cm. (2x60 Inch)	81 23 44
101046	Wencon Pipe Tape 1046 Box of 4 rolls of 5 x 350 cm. (2x140 Inch)	81 23 48
101047	Wencon Pipe Tape 1047 Box of 2 rolls of 5 x 150 cm + 1 stick of 125 gram Wencon Putty	-
101048	Wencon Pipe Tape 1048 Box of 5 rolls of 5 x 150 cm + 1 stick of 125 gram Wencon Putty	-
101040	Wencon Putty 1040 Box of 8 x 125 gram	81 23 42
101042	Wencon Putty 1042 Box of 4 x 125 gram	-
101012	Wencon Underwater UW Putty 1012 Box of 1 kg	81 25 91

