

Pneumatic quick release couplers PARKER RECTUS

Parker Rectus 26KA brass quick release couplers & plugs Euro profile

Profile is 100% exchangeable with: CJEN-320, JWL-520, PLC-AC71 en Rectus 25KA & Rino-26.

Material housing, cup, valve and sealing ring in brass.

Spring in stainless steel AISI-301. Balls in stainless steel AISI-420. Seal in Buna N, Thread BSP & BSPT

Application: compressors, automotive, machinery building and air tools.

Flow: 600 L/min Valve drain: 7,2 mm Max temp: -20°C up to +100°C, Max pressure: 35 bar.



Article No.	Description	Type
609000	Quick coupler 26KA G 1/8" male	26KAAW10MPX
609001	Quick coupler 26KA G 1/4" male	26KAAW13MPX
609002	Quick coupler 26KA G 3/8" male	26KAAW17MPX
609003	Quick coupler 26KA G 1/2" male	26KAAW21MPX
609007	Quick coupler 26KA G 1/4" female	26KAIW13MPX
609008	Quick coupler 26KA G 3/8" female	26KAIW17MPX
609009	Quick coupler 26KA G 1/2" female	26KAIW21MPX
609013	Quick coupler 26KA 6 mm hose	26KATF06MPX
609014	Quick coupler 26KA 8 mm hose	26KATF08MPX
609015	Quick coupler 26KA 9 mm hose	26KATF09MPX
609016	Quick coupler 26KA 10 mm hose	26KATF10MPX
609017	Quick coupler 26KA 13 mm hose	26KATF13MPX
609050	Plug 26SF G 1/8" male	26SFAW10MXX
609051	Plug 26SF G 1/4" male	26SFAW13MXX
609052	Plug 26SF G 3/8" male	26SFAW17MXX
609053	Plug 26SF G 1/2" male	26SFAW21MXX



Article No.	Description	Type
609054	Plug 26SF G 1/8" female	26SFIW10MXX
609055	Plug 26SF G 1/4" female	26SFIW13MXX
609056	Plug 26SF G 3/8" female	26SFIW17MXX
609057	Plug 26SF G 1/2" female	26SFIW21MXX
609061	Plug 26SF 6 mm hose end	26SFTF06MXX
609062	Plug 26SF 8 mm hose end	26SFTF08MXX
609063	Plug 26SF 9 mm hose end	26SFTF09MXX
609064	Plug 26 SF 10 mm hose end	26SFTF10MXX
609065	Plug 26 SF 13 mm hose end	26SFTF13MXX
609066	Plug to PU hose 6-4 mm OD-ID	26SFKO06MXX
609067	Plug to PU hose 8-6 mm OD-ID	26SFKO08MXX
609068	Plug to PU hose 10-8 mm OD-ID	26SFKO10MXX
609069	Plug to PU hose 12-9 mm OD-ID	26SFKO12MXX



Parker Rectus 26KE Safety quick release coupler made of nickel plated brass with plastic safety cup Euro profile

Profile is 100% exchangeable with: CJEN-320, JWL-520, PLC-AC71 en Rectus 25KA + 26KA & Rino-26

Material housing, valve and seal ring in nickel plated brass, safety cup blue plastic.

Spring in stainless steel AISI-301. Balls in stainless steel AISI-420. Seals Perbunaan, thread BSP & BSPT. Plugs: hardened steel (25SF) or brass (26SF).

Application: compressors, automotive, machinery building and air tools.

Flow: 1400 L/min Valve drain: 7,2 mm Max temp: -20°C up to +60°C, Max pressure: 12 bar.

Article No.	Description	Type
609095	Safety quick coupler 26KE G 1/4" male	26KEAW13MPN
609096	Safety quick coupler 26KE G 3/8" male	26KEAW17MPN
609097	Safety quick coupler 26KE G 1/2" male	26KEAW21MPN
609098	Safety quick coupler 26KE G 1/4" female	26KEIW13MPN
609099	Safety quick coupler 26KE G 3/8" female	26KEIW17MPN
609100	Safety quick coupler 26KE G 1/2" female	26KEIW21MPN
609101	Safety quick coupler 26KE 6 mm hose end	26KETF06MPN
609102	Safety quick coupler 26KE 8 mm hose end	26KETF08MPN
609103	Safety quick coupler 26KE 9 mm hose end	26KETF09MPN
609104	Safety quick coupler 26KE 10 mm hose end	26KETF10MPN
609105	Safety quick coupler 26KE 13 mm hose end	26KETF13MPN



Parker Rectus 25KA Ultra Flow quick release coupler made of nickel plated brass HEAVY DUTY type Euro profile

Profile is 100% exchangeable with: CJEN-320, JWL-520, PLC-AC71 en Rectus 26KA & Rino-26.

Material housing, cup, valve and sealing ring in nickel plated brass. Spring in stainless steel AISI-301. Balls in stainless steel AISI-420.


Seals Perbunaan, thread BSP & BSPT

Plugs: hardened steel (26SF).

Application: compressors, automotive, machinery building and air tools.

Flow: 800 L/min Valve drain: 7,4 mm Max temp: -20°C up to +100°C, Max pressure: 35 bar.

Article No.	Description	Type
609075	Quick coupler 25KA G 1/4" male	25KAAK13MPN
609076	Quick coupler 25KA G 3/8" male	25KAAK17MPN
609077	Quick coupler 25KA G 1/2" male	25KAAK21MPN
609078	Quick coupler 25KA G 1/4" female	25KAIW13MPN
609079	Quick coupler 25KA G 3/8" female	25KAIW17MPN
609080	Quick coupler 25KA G 1/2" female	25KAIW21MPN
609081	Quick coupler 26KE 6 mm hose end	25KATF06MPN
609082	Quick coupler 26KE 8 mm hose end	25KATF08MPN
609083	Quick coupler 26KE 9 mm hose end	25KATF09MPN
609084	Quick coupler 26KE 10 mm hose end	25KATF10MPN
609085	Quick coupler 26KE 13 mm hose end	25KATF13MPN

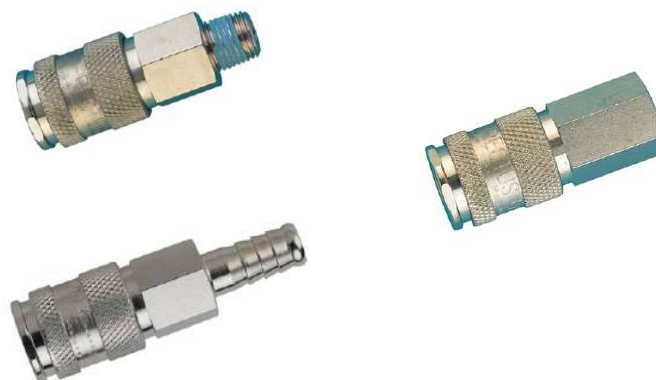

Pneumatic quick release couplers PARKER RECTUS

Parker Rectus 1600KE safety quick release coupler made of nickel plated brass / steel HEAVY DUTY Euro profile

Double safety lock (release air pressure than disconnect coupler). According to ISO 4414.

Profile is 100% exchangeable with: CJEN-320, JWL-520-530, PLC-AC71 and Rectus 26KA & Rino-26.

Material housing, valve and seal ring in nickel plated brass, safety ring nickel plated brass. Material valve housing zinc plated passivated steel.

Spring in stainless steel AISI-301. Balls in stainless steel AISI-420. Seals NBR. Plugs: hardened steel (26SF).

Application: compressors, automotive, machinery building and air tools.

Flow: 2020 L/min Valve drain: 7,4 mm Max temp: -20°C up to +100°C, Max pressure: 12 bar.



Article No.	Description	Type
609110	Safety quick coupler 1600KE G 1/4" male	1600KEAK13SPN
609111	Safety quick coupler 1600KE G 3/8" male	1600KEAK17SPN
609112	Safety quick coupler 1600KE G 1/2" male	1600KEAK21SPN
609115	Safety quick coupler 1600KE G 1/4" female	1600KEIW13SPN
609116	Safety quick coupler 1600KE G 3/8" female	1600KEIW17SPN
609117	Safety quick coupler 1600KE G 1/2" female	1600KEIW21SPN
609120	Safety quick coupler 1600KE 8 mm hose end	1600KETF08SPN
609121	Safety quick coupler 1600KE 9 mm hose end	1600KETF09SPN
609122	Safety quick coupler 1600KE 10 mm hose end	1600KETF10SPN
609123	Safety quick coupler 1600KE 13 mm hose end	1600KETF13SPN



Parker Rectus 25SF hardened steel galvanized plugs HEAVY DUTY Euro profile

Plugs to use in combination with the couplers 25KA, 26KE & 1600KE.

Article No.	Description	Type
609030	Plug 25SF G 1/8" male	25SFAK10SXN
609031	Plug 25SF G 1/4" male	25SFAK13SXN
609032	Plug 25SF G 3/8" male	25SFAK17SXN
609033	Plug 25SF G 1/2" male	25SFAK21SXN
609034	Plug 25SF G 1/8" female	25SFIW10SXN
609035	Plug 25SF G 1/4" female	25SFIW13SXN
609036	Plug 25SF G 3/8" female	25SFIW17SXN
609037	Plug 25SF G 1/2" female	25SFIW21SXN
609038	Plug 25SF 6 mm hose end	25SFTF06SXN
609039	Plug 25SF 8 mm hose end	25SFTF08SXN
609040	Plug 25SF 9 mm hose end	25SFTF09SXN
609041	Plug 25SF 10 mm hose end	25SFTF10SXN
609042	Plug 25SF 13 mm hose end	25SFTF13SXN



Parker Rectus 33KA Ultra Flow quick release coupler, hardened galvanized steel HEAVY DUTY type QIC 10 Profile

Profile is 100% exchangeable with: Atlas Copco QIC 10.


Material housing hardened galvanized steel, back of nickel plated brass. Spring in stainless steel AISI-301. Balls in stainless steel AISI-420.

Seals: NBR, thread BSP & BSPT. Plugs: hardened nickel plated steel (33SF).

Application: air and fluids such as compressors, automotive, machinery building and air tools.

Flow: 1400 L/min Valve drain: 8.0 mm Max temp: -20°C up to +100°C, Max pressure: 35 bar.

Article No.	Description	Type
609701	Quick coupler 33KA G 1/4" male	33KAAK13SPN
609702	Quick coupler 33KA G 3/8" male	33KAAK17SPN
609703	Quick coupler 33KA G 1/2" male	33KAAK21SPN
609705	Quick coupler 33KA G 1/4" female	33KAIW13SPN
609706	Quick coupler 33KA G 3/8" female	33KAIW17SPN
609707	Quick coupler 33KA G 1/2" female	33KAIW21SPN
609710	Quick coupler 33KA 6 mm hose end	33KATF06SPN
609711	Quick coupler 33KA 8 mm hose end	33KATF08SPN
609712	Quick coupler 33KA 10 mm hose end	33KATF10SPN
609713	Quick coupler 33KA 13 mm hose end	33KATF13SPN

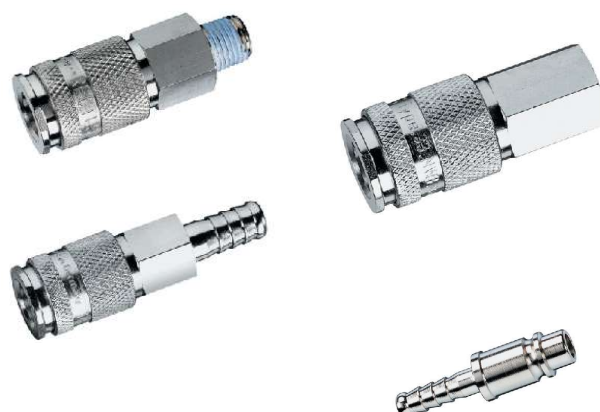

Parker Rectus 33SF hardened steel galvanized plugs HEAVY DUTY Euro profile

Plugs to use in combination with the couplers 33KA.

Article No.	Description	Type
609715	Plug 33SF G 1/8" male	33SFAK10SXN
609716	Plug 33SF G 1/4" male	33SFAK13SXN
609717	Plug 33SF G 3/8" male	33SFAK17SXN
609718	Plug 33SF G 1/2" male	33SFAK21SXN
609720	Plug 33SF G 1/4" female	33SFIW13SXN
609721	Plug 33SF G 3/8" female	33SFIW17SXN
609722	Plug 33SF G 1/2" female	33SFIW21SXN



Article No.	Description	Type
609725	Plug 33SF 6 mm hose end	33SFTF06SXN
609726	Plug 33SF 8 mm hose end	33SFTF08SXN
609727	Plug 33SF 10 mm hose end	33SFTF10SXN
609728	Plug 33SF 13 mm hose end	33SFTF13SXN

Pneumatic quick release couplers PARKER RECTUS

Parker Rectus 34KA Ultra Flow quick release coupler, hardened galvanized steel HEAVY DUTY type QIC 15 Profile

Profile is 100% exchangeable with: Atlas Copco QIC 15.

Material housing hardened galvanized steel, back of nickel plated brass. Spring in stainless steel AISI-301. Balls in stainless steel AISI-420.


Seals: NBR, thread BSP & BSPT. Plugs: hardened nickel plated steel (SF34)

Application: air and fluids such as compressors, automotive, machinery building and air tools.

Flow: 1400 L/min Valve drain: 8.0 mm Max temp: -20°C up to +100°C, Max pressure: 35 bar.



Article No.	Description	Type
609740	Quick coupler 34KA G 1/4" male	34KAAK13SPN
609741	Quick coupler 34KA G 3/8" male	34KAAK17SPN
609742	Quick coupler 34KA G 1/2" male	34KAAK21SPN
609743	Quick coupler 34KA G 3/4" male	34KAAK26SPN
609744	Quick coupler 34KA G 1/4" female	34KAIW13SPN
609745	Quick coupler 34KA G 3/4" female	34KAIW17SPN
609746	Quick coupler 34KA G 1/2" female	34KAIW21SPN
609747	Quick coupler 34KA G 3/4" female	34KAIW26SPN
609748	Quick coupler 34KA 10 mm hose end	34KATF10SPN
609749	Quick coupler 34KA 13 mm hose end	34KATF13SPN
609750	Quick coupler 34KA 17 mm hose end	34KATF16SPN
609751	Quick coupler 34KA 19 mm hose end	34KATW19SPN

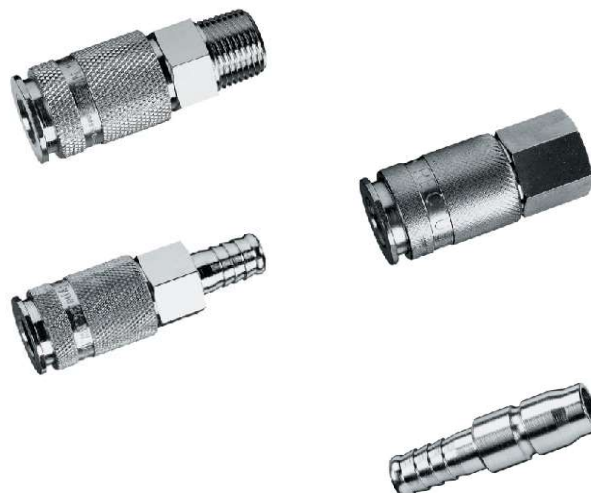

Parker Rectus 34SF hardened steel galvanized plugs HEAVY DUTY Euro profile

Plugs to use in combination with the couplers 34KA.

Article No.	Description	Type
609755	Plug 34SF G 1/4" male	34SFAK13SXN
609756	Plug 34SF G 3/8" male	34SFAK17SXN
609757	Plug 34SF G 1/2" male	34SFAK21SXN
609760	Plug 34SF G 3/8" female	34SFIW17SXN
609761	Plug 34SF G 1/2" female	34SFIW21SXN



Article No.	Description	Type
609765	Plug 34SF 6 mm hose end	34SFTF06SXN
609766	Plug 34SF 10 mm hose end	34SFTF10SXN
609767	Plug 34SF 13 mm hose end	34SFTF13SXN
609768	Plug 34SF 16 mm hose end	34SFTF16SXN

Parker Rectus Blow Guns

Temperature Air: -15°C to +50°C, dry air: -20°C to +80°C. Connection G 1/4" female thread.

Article No.	Description	Type
609146	Blow Gun aluminium body and sintered nozzle. Brass valve, BUNA N seals. G 1/4" female. Pressure max. 35 bar.	AR



Article No.	Description	Type
609147	Blow Gun aluminium body, long nozzle. Brass valve, BUNA N seals. G 1/4" female. Pressure max. 10 bar.	AV



Article No.	Description	Type
609148	Blow Gun aluminium body, venturi nozzle. Brass valve, BUNA N seals. G 1/4" female. Pressure max. 10 bar.	AT



Article No.	Description	Type
609149	Blow Gun polymer body, fixed nozzle. Brass valve, BUNA N seals. G 1/4" female. Pressure max. 10 bar.	AN



Article No.	Description	Type
609150	Blow Gun polymer body, aluminium long nozzle. Brass valve, BUNA N seals. G 1/4" female. Pressure max. 10 bar.	AK



Article No.	Description	Type
609153	Blow Gun polymer body, venturi nozzle. Brass valve, BUNA N seals. G 1/4" female. Pressure max. 10 bar.	AX



Article No.	Description	Type
430000	Blow Gun aluminium body and nozzle. Brass valve, BUNA N seals. G 1/4" female. Pressure max. 10 bar.	AR



Article No.	Description	Type
430002	Safety Blow Gun aluminium body and brass nozzle. Brass valve, G 1/4" female. For cleaning. Pressure max. 10 bar.	ASG-1



Air -Pro Blow Guns with extra long nozzle

Temperature Air: -15°C to +50°C, Dry air: -20°C to +80°C.

Connection G 1/4" female thread. ABS Plastic body, aluminium nozzle.

Maximum work pressure WP 6 bar, Burst pressure 11 bar.

Article No.	Description	Type
608422	Blow gun with nozzle length 330 mm	LD13
608423	Blow gun with nozzle length 500 mm	LD20

Article No.	Description	Type
608424	Blow gun with nozzle length 1000 mm	LD40

