

LED Indoor surface light fixtures SECOM

Wall LED Surface luminaire SECOM DALA for wall or ceiling mounting

Body made of thermo painted aluminium coated.
PMMA optic that provides uniform illumination over its entire surface with a minimum thickness of the luminaire.

All models include high power factor drivers.

Composed with 238 LEDs Osram Duris E3 and 63 LED Osram Duris E5 with a total power of 15W/ 20W.
Standard color 4000K (optional 3000K and 5700K).

Mounting: Directly screwed on wall or ceiling.

Voltage range: 230Vac 50/60Hz.

Expected life span 40000 hours L70B10.

Driver 700 mA.

CRI of >80.

Dimensions Diameter 245mm x height 50mm. Weight 1.8 kg.

Protection IP44. Fast and easy installation.

Optional: Dimmable 1-10V driver, Dali dimmable driver, Motion detector integrated.



Article No.	Description	Watt	Lumen	Color Kelvin
83SEC42040184	Dala White	15/17.65	1740	4000K
83SEC42040284	Dala Black	15/17.65	1740	4000K
83SEC42045284	Dala Matt Chrome	15/17.65	1740	4000K
83SEC42049084	Dala Titanium	15/17.65	1740	4000K
83SEC4204200184	Dala White	20/23	2677	4000K
83SEC4204200284	Dala Black	20/23	2677	4000K
83SEC4204205284	Dala Matt Chrome	20/23	2677	4000K
83SEC4204209084	Dala Titanium	20/23	2677	4000K



LED recessed fixture Downlight SECOM AIRCOM

Extra flat recessed downlight equipped with the latest LED technology to achieve the best possible efficiency and light uniformity. Beam angle optics 110°.

Ideal for installation in all types of demountable ceilings, technical ceilings and plasterboard ceilings.
Diffuser made of thermoplastic for optimal strength and nice diffused light.

Photobiological value of 0. Safe and protects the human eye.

Connection voltage: 220-240Vac 50/60Hz, Class II.

Estimated life >50000 hours L80B10 @ Tc 75°.

Driver flicker-free. Power factor <95%.

Ambient temperature -20° to +35°.

CRI or >80.

Dimensions Diameter 218mm x height 10mm, required ceiling opening ø205 mm. Weight 0.6 kg.

Protection IP44. Quick and easy installation.

Optional: Dimmable, dimmable 1-10V driver, Dali 2.0 dimmable driver, dimmable drive with push button, DM8 Integrated motion detector.

Emergency lighting option 1 hour or 3 hours with auto test or 3 hours with self test (Class II).

Article No.	Description	Watt	Lumen	Color Kelvin
83SEC42210120383DRD	Aircom white	20	2.074	3000K
83SEC42210120384DRD	Aircom white	20	2.074	4000K

Trevos SB LED Indoor Luminaire

Trevos LED Indoor luminaire IP20

Aluminium indoor LED light fitting intended for surface-mounted installation on the ceiling or on the wall, with diffuser made of translucent acrylate and with built-in switch in side lid.

The light fitting is suitable for sanitary facilities, kitchen units, wall units, cloakrooms, work surfaces and shop windows.

Power supply Isolated, current driver.

Voltage range 220-240Vac 50/60Hz, Mac Adam 3 SDCM.

Protection IP20, Rank I.

For ambient temperatures max. +35°C.

Housing made of aluminium, white powder painted RAL 9003.

Diffuser translucent polycarbonate (PC), UV stable and impact resistant.

Cable gland of white rubber. Side covers: White plastic (ABS).

Connection: Terminal block screwed, three poles.

Switch built-in at side cover.

LED efficacy **up to 145 lm/w.**

Light color standard 4000K (optional 3000K), CRI >80.

Factory warranty 5 years.



Attachment method: directly to a ceiling or wall with use of screws.

Slide mounting spacers (PA GF).

The watt and lumen values can, in accordance with valid standards, vary by ± 7,5 %.

* = Luminous flux of light fitting.

Developed and produced in the Czech Republic.

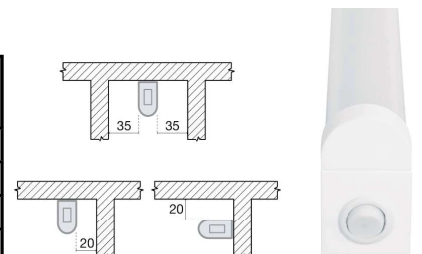

Article No.	Description	Watt	Lumen *	Dimensions in mm AxBxC	Mounting spacing in mm D	Light color
89TR22415	SB LED 1.1ft 1100/840	9	1080	360x38x67	230	4000K
89TR22425	SB LED 1.2ft 2200/840	15	2130	590x38x67	460	4000K
89TR22435	SB LED 1.4ft 4400/840	30	4250	1150x38x67	1020	4000K
89TR22445	SB LED 1.5ft 5500/840	37	5360	1430x38x67	1300	4000K