

## Indoor Recessed LED Downlight CL59

### Indoor LED Downlight CL59

The CL59 is a modern recessed indoor downlight designed for all kind of areas such as offices, schools, hotels, shops, crew cabins, corridors etc. The luminaire provide a pleasant uniform diffuus light with extremely low glare.

Equipped with high lumen SMD LED.

Housing of die casting aluminium. Standard color white (RAL 9016) and optional black, silver and chrome.

Standard light colours 3.000K and 4.000K.

Multi\*: Changeable by light switch 3.000 up to 5.700K

Sizes from Ø 2 inch up to Ø 10 inch.

Voltage: 220-240Vac and 50/60Hz. Electronic LED Driver included.

IP Rating: IP54 at light and IP20 at top section.

Impact resistance: IK06.

Diffuser: PC (polycarbonate) opal.

Light beam: 90°.

Calculated lifetime: 50.000h. L80B10.

For ambient temperatures of -20°C to +45°C.


Power factor: ≥ 0,9.

CRI: Ra>80.

Optional dimmable versions.

Manufacturers warrantee: 5 year

Product from Switzerland.

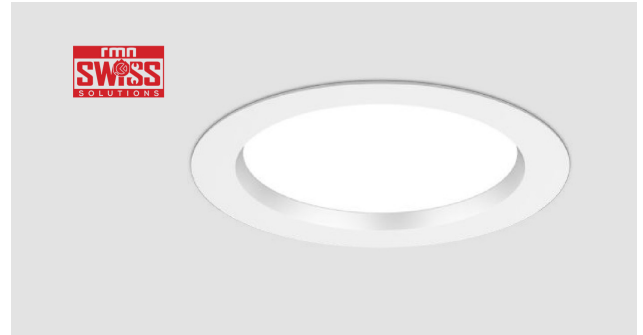

#### Article numbers:

Article No.	Description	Watt	Lumen	Light colour	Diam. Ø x H mm	Cut out Ø mm	Housing
83PSL5902007	Downlight Recessed CL59-2-7W	7	580	4.000 K	80 x 39	60-70	White
83PSL5902007-3K	Downlight Recessed CL59-2-7W	7	580	3.000 K	80 x 39	60-70	White
83PSL5902007-D	Downlight Recessed CL59-2-7W-D	7	580	Multi*	80 x 39	60-70	White
83PSL5902510	Downlight Recessed CL59-2.5-10W	10	685	4.000 K	83 x 39,5	70-75	White
83PSL5902510-3K	Downlight Recessed CL59-2.5-10W	10	685	3.000 K	83 x 39,5	70-75	White
83PSL5903010	Downlight Recessed CL59-3-10W	10	980	4.000 K	110 x 44	90-95	White
83PSL5903010-3K	Downlight Recessed CL59-3-10W	10	980	3.000 K	110 x 44	90-95	White
83PSL5903513	Downlight Recessed CL59-3.5-13W	13	990	4.000 K	120 x 39	100-110	White
83PSL5903513-3K	Downlight Recessed CL59-3.5-13W	13	990	3.000 K	120 x 39	100-110	White
83PSL5904012	Downlight Recessed CL59-4-12W	12	1.000	4.000 K	145 x 48	120-130	White
83PSL5904012-3K	Downlight Recessed CL59-4-12W	12	1.000	3.000 K	145 x 48	120-130	White
83PSL5905018	Downlight Recessed CL59-5-18W	18	1.950	4.000 K	170 x 49	140-150	White
83PSL5905018-3K	Downlight Recessed CL59-5-18W	18	1.950	3.000 K	170 x 49	140-150	White
83PSL5906018	Downlight Recessed CL59-6-18W	18	2.050	4.000 K	190 x 49	160-170	White
83PSL5906018-3K	Downlight Recessed CL59-6-18W	18	2.050	3.000 K	190 x 49	160-170	White
83PSL5908025	Downlight Recessed CL59-8-25W	25	3.000	4.000 K	228 x 48	200-210	White
83PSL5908025-3K	Downlight Recessed CL59-8-25W	25	3.000	3.000 K	228 x 48	200-210	White
83PSL5910035	Downlight Recessed CL59-10-35W	35	4.100	4.000 K	280 x 56	230-260	White
83PSL5910035-3K	Downlight Recessed CL59-10-35W	35	4.100	3.000 K	280 x 56	230-260	White

