

Linear watertight luminaire SALUKA-LED

Metal dustproof lighting fixture SALUKA-LED with IP66 splash water and dust resistance designed for workshops, garages, industrial and production areas.

Complies with relevant EMC regulations. Meets photobiological safety according to EN 62471:2009.

Suitable for persons with high sensitivity to UV radiation and blue spectrum part.

Screwless three-pole terminal block, maximum diameter of wires 2.5mm².

Cable gland M20 suitable for cables with outer diameter 7-12mm.

Rated voltage 220-240Vac 50/60Hz, 220-240 VDC 0Hz, Electronic ballast.

Light color 4000K RA>80, CRI+80, MaxAdam3. (other colors available on request).

Designed service life L80B10 70.000 hours at Ta +40°C, L70B10 110.000 hours at Ta +40°C.

Diffuser; clear hardened safety glass or Opal mat safety glass.

Body of white painted sheet steel RAL 9003 (optional in Stainless Steel AISI 304 or AISI 316).

Protection category IP66, IK07 and class I.

Temperature operating range from -20°C to +40/45°C and a special version +60°C.

HACCP Version IP64 Suitable for food industry available.

Multiple options on request available such as a dimmable ballast (DALI, DSI, 1-10V), emergency light, through wiring, Gesis connector etc.




Tolerance of luminous flux and power input of the lighting fixture +/- 10%.

Manufacturers warranty 5 years.


* = 5.000K equivalent to fluorescent lamp colour 865

VYR TYCH

SALUKA-LED Optional Stainless Steel housing available in AISI 304 & AISI 316

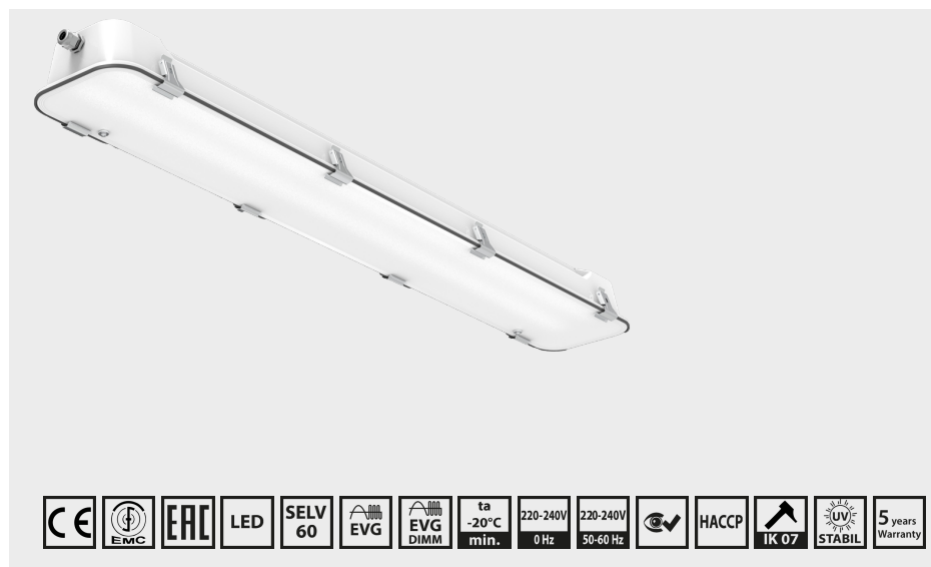

With CLEAR front glass



OP = with OPAL front glass
Diffused light less glare

Article No.	Description	Wattage	Lumen output	LxWxH mm	Ta max (°C)	Diffuser	Light Colour	Lightbeam
83VT053030	Saluka LED 2500-218-4K	16	2.120	705x192x90	+45°C	Clear	4.000K	WB >80°
83VT053031	Saluka LED 5000-218-4K	33	4.166	705x192x90	+45°C	Clear	4.000K	WB >80°
83VT053032	Saluka LED 5000-236-4K	33	4.336	1305x192x90	+60°C	Clear	4.000K	WB >80°
83VT053033	Saluka LED 10000-236-4K	66	8.333	1305x192x90	+45°C	Clear	4.000K	WB >80°
83VT053034	Saluka LED 7500-258-4K	50	6.504	1605x192x90	+45°C	Clear	4.000K	WB >80°
83VT053035	Saluka LED 12550-258-4K	80	10.429	1605x192x90	+40°C	Clear	4.000K	WB >80°
83VT053036	Saluka LED-OP 2500-218-4K	16	2.079	705x192x90	+45°C	Opal	4.000K	WB >80°
83VT053037	Saluka LED-OP 5000-218-4K	33	4.362	705x192x90	+45°C	Opal	4.000K	WB >80°
83VT053038	Saluka LED-OP 5000-236-4K	33	4.254	1305x192x90	+60°C	Opal	4.000K	WB >80°
83VT053039	Saluka LED-OP 10000-236-4K	66	8.724	1305x192x90	+45°C	Opal	4.000K	WB >80°
83VT053040	Saluka LED-OP 7500-258-4K	50	6.381	1605x192x90	+45°C	Opal	4.000K	WB >80°
83VT053041	Saluka LED-OP 12550-258-4K	80	10.918	1605x192x90	+40°C	Opal	4.000K	WB >80°
83VT053036-5K	Saluka LED-OP 2500-218-5K	16	2.079	705x192x90	+45°C	Opal	5.000K*	WB >80°
83VT053037-5K	Saluka LED-OP 5000-218-5K	33	4.362	705x192x90	+45°C	Opal	5.000K*	WB >80°
83VT053038-5K	Saluka LED-OP 5000-236-5K	33	4.254	1305x192x90	+60°C	Opal	5.000K*	WB >80°
83VT053039-5K	Saluka LED-OP 10000-236-5K	66	8.724	1305x192x90	+45°C	Opal	5.000K*	WB >80°
83VT053040-5K	Saluka LED-OP 7500-258-5K	50	6.381	1605x192x90	+45°C	Opal	5.000K*	WB >80°
83VT053041-5K	Saluka LED-OP 12550-258-5K	80	10.918	1605x192x90	+40°C	Opal	5.000K*	WB >80°

Accessories SALUKA-LED

There are multiple accessories available for the SALUKA-LED to meet the customers needs.

Article No.	Description
83VT051139	Saluka set of ceiling brackets (2 pcs) (A)
83VT063754	Saluka set of adjustable bracket (2 pcs) (B)
83VT051145	Saluka pole bracket for Ø 50mm Stainless steel (1 pc) (C)
83VT064018	Saluka pole bracket for Ø 40mm Stainless steel (1 pc) (C)
83VT051147	Saluka wall arm bracket 60° stainless steel (1 pc) (D)



A



B



C



D