

Vyrtych SALUKA-LED-PLUS-FROST watertight LED Linear Luminaire IP66

Linear watertight luminaire SALUKA-LED

Metal dustproof lighting fixture SALUKA-LED with splash water resistance designed for workshops, garages, industrial and production areas with higher ambient temperature or warehouses and freezers with low temperatures.

Complies with relevant EMC regulations. Meets photobiological safety according to EN 62471:2009.

Suitable for persons with high sensitivity to UV radiation and blue spectrum part.

Screwless three-pole terminal block, maximum diameter of wires 2.5mm².

Cable gland M20 suitable for cables with outer diameter 7-12mm.

Rated voltage 220-240Vac 50/60Hz, 220-240 VDC 0Hz, Electronic ballast.

Light color 4000K RA>80, CRI+80, MaxAdam3. (other colors available on request).

Designed service life L80B10 75.000 hours at Ta +40°C, L70B10 110.000 hours at Ta +40°C.

Diffuser; clear hardened safety glass or Opal mat safety glass.

Body of white painted sheet steel RAL 9003 (optional in Stainless Steel AISI 304 or AISI 316).

Protection category IP66, IK07 and class I.


Temperature operating range from -40°C to +70°C.

Multiple options on request available such as a dimmable ballast (DALI), emergency light, through wiring, Gesis connector etc.

Tolerance of luminous flux and power input of the lighting fixture +/- 10%.

Factory warranty 5 years



* = 5.000K equivalent to fluorescent lamp colour 865

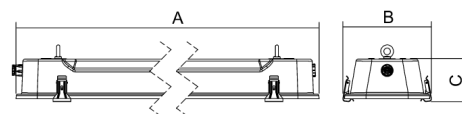

SALUKA-LED Optional Stainless Steel housing available in AISI 304 & AISI 316

Important note:

Declared for ambient temperature decreased about 5-10°C

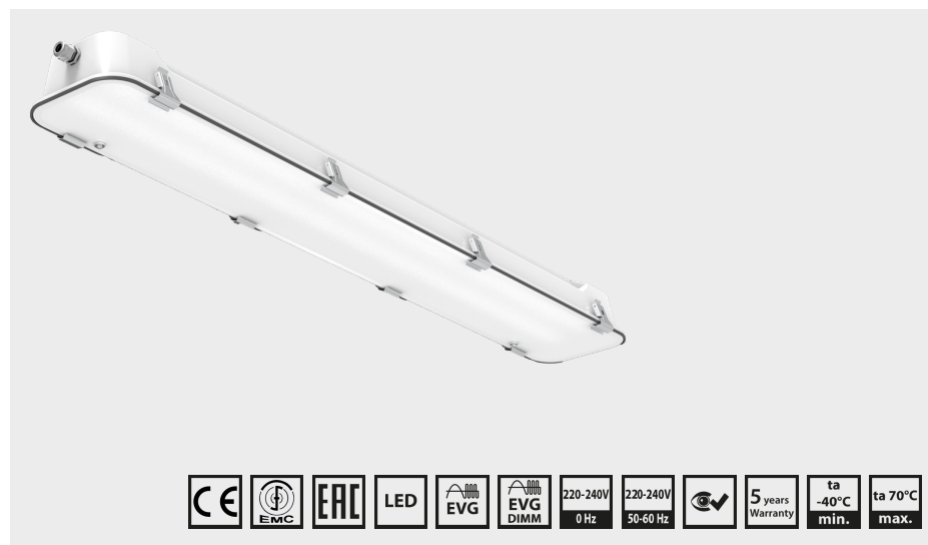

OP = with OPAL front glass
Diffused light less glare

Article No.	Description	Wattage	Lumen output	LxWxH mm	Ta max (°C)	Diffuser	Light Colour	Lightbeam
83VT053019	Saluka LED-PLUS-OP 2500-118-4K	17	2.245	705x192x90	+65°C	Opal	4.000K	WB >80°
83VT053020	Saluka LED-PLUS-OP 5000-218-4K	33	4.223	705x192x90	+60°C	Opal	4.000K	WB >80°
83VT053021	Saluka LED-PLUS-OP 5000-136-4K	17	2.245	1305x192x90	+65°C	Opal	4.000K	WB >80°
83VT053022	Saluka LED-PLUS-OP 5000-236-4K	33	4.223	1305x192x90	+60°C	Opal	4.000K	WB >80°
83VT053023	Saluka LED-PLUS-OP 3500-158-4K	25	3.140	1605x192x90	+60°C	Opal	4.000K	WB >80°
83VT053024	Saluka LED-PLUS-OP 7500-258-4K	47	6.625	1605x192x90	+65°C	Opal	4.000K	WB >80°
83VT053025	Saluka LED-PLUS-OP 9600-258-4K	57	7.876	1605x192x90	+65°C	Opal	4.000K	WB >80°
83VT053017	Saluka LED-PLUS70-OP 5000-236-4K	28	4.270	1305x192x90	+70°C	Opal	4.000K	WB >80°
83VT053018	Saluka LED-PLUS70-OP 7500-258-4K	43	6.669	1605x192x90	+70°C	Opal	4.000K	WB >80°
83VT054492	Saluka LED-FROST-OP 5000-136-4K	28	4.382	1305x192x90	-40°C	Opal	4.000K	WB >80°
83VT054493	Saluka LED-FROST-OP 10000-236-4K	56	8.245	1305x192x90	-40°C	Opal	4.000K	WB >80°
83VT054494	Saluka LED-FROST-OP 4750-158-4K	26	4.255	1605x192x90	-40°C	Opal	4.000K	WB >80°
83VT054495	Saluka LED-FROST-OP 7500-258-4K	43	6.830	1605x192x90	-40°C	Opal	4.000K	WB >80°
83VT054496	Saluka LED-FROST-OP 12500-258-4K	69	10.348	1605x192x90	-40°C	Opal	4.000K	WB >80°

For light colour 5.000K use same article number but with extension -5K. Example 83VT053019-5K

Accessories SALUKA-LED

There are multiple accessories available for the SALUKA-LED to meet the customers needs.

Article No.	Description
83VT051139	Saluka set of ceiling brackets (2 pcs) (A)
83VT063754	Saluka set of adjustable bracket (2 pcs) (B)
83VT051145	Saluka pole bracket for Ø 50mm Stainless steel (1 pc) (C)
83VT064018	Saluka pole bracket for Ø 40mm Stainless steel (1 pc) (C)
83VT051147	Saluka wall arm bracket 60° stainless steel (1 pc) (D)



A



B



C



D