

MIOL-B-Ex MIOL-C-Ex






MEDIUM INTENSITY


Medium intensity obstruction light multiled type, compliance to ICAO type B, type C and FAA L-864, single or twin, night only.

- Based on LED technology
- Steady burning red light for MIOL-C
- Flashing red light for MIOL-B (20-60 fpm)
- Visible red light + infrared emission (see code 6)
- Long life time >10+ years expectancy
- Stabilized light output
- Weight: 14,8 kg
- ATEX: Exde IIC T4

ExtDA21 IP65 T135°C


- Power consumption for MIOL-C: 54W (230VAC), 39W (24VDC)
- Power consumption for MIOL-B @20fpm: 9,3W (230VAC), 3,1W (24VDC)
- Power consumption for MIOL-B @40fpm: 12,9W (230VAC), 5,7W (24VDC)

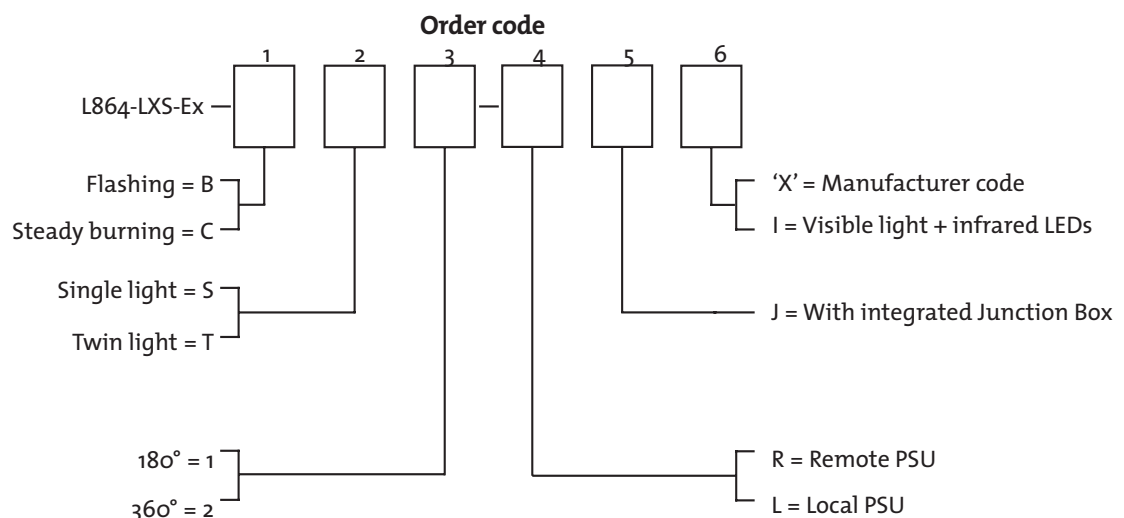

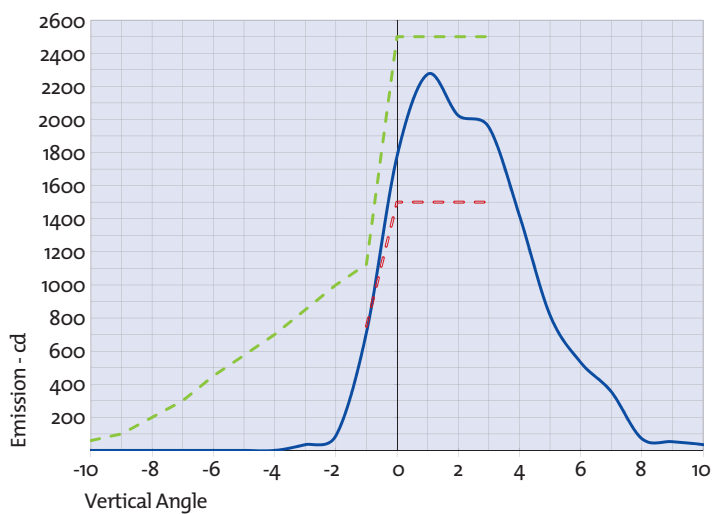


- L864-LXS-B/C average emission level at 90°C ambient temperature
- ICAO ANNEX 14 medium intensity type B/C Minimum Required Intensity
- ICAO ANNEX 14 medium intensity type B/C Maximum Required Intensity

BEACON FRONT VIEW

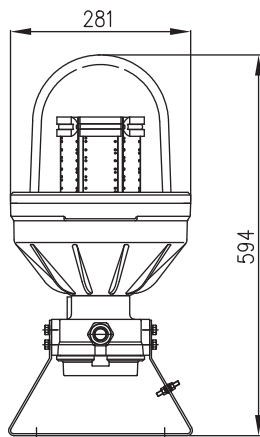

BEACON SIDE VIEW

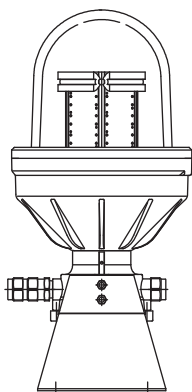

FIXING DETAILS

