



Linear watertight luminaire EUROPA-LED

Robust impact resistant IK10 body and IP66 protection against moisture and dirt
Stainless steel closures and fasteners. Insulation class I.
 Complies with relevant EMC regulations. Meets photobiological safety according to EN 62471:2009. Suitable for persons with high sensitivity to UV radiation and blue spectrum part.
 Screwless three-pole terminal block, maximum diameter of wires 2.5mm².
 Cable gland PG13.5 suitable for cables with outer diameter 7-12mm
 Rated voltage 220-240Vac 50/60Hz, 220-240 VDC 0Hz, Electronic ballast.
 Light color 4000K RA>80, MaxAdam3. (other colors available on request).
 Designed service life L80B10 70.000 hours at Ta +30°C, L70B10 100.000 hours at Ta +30°C.
 Lens angle 120°, diffuser PC (polycarbonate) opal. UV stable plastic parts.
 Body plastic material PC (polycarbonate), grey color RAL 7035. Test by flaming/hot loop +850°C.
 Protection category IP66, IK10 and class I.
 Temperature operating range from -20°C to +40°C.
 Fixing materials included. HACCP Suitable for food industry.
 Multiple options on request available such as quick connectors, dimmable ballast (DALI, DSI, 1-10V), Nano protection layer, emergency light, through wiring, insulation class II.
 Tolerance of luminous flux and power input of the lighting fixture +/- 10%.
 Factory warranty 5 years. Version NSP = stainless steel clips.

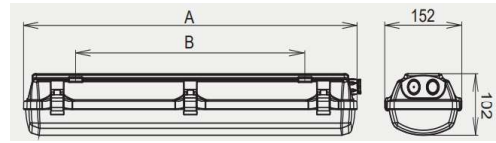

| Article No. | Description | Wattage | Lumen output | LxWxH mm |
|---------------|-------------------------|---------|--------------|--------------|
| 83VT055374NSP | Europa LED 1250-118-4K | 8 | 1114 | 670x152x102 |
| 83VT055375NSP | Europa LED 2500-218-4K | 16 | 2228 | 670x152x102 |
| 83VT055376NSP | Europa LED 5000-218-4K | 33 | 4531 | 670x152x102 |
| 83VT055373NSP | Europa LED 2600-136-4K | 17 | 2278 | 1280x152x102 |
| 83VT055372NSP | Europa LED 5100-236-4K | 33 | 4557 | 1280x152x102 |
| 83VT055377NSP | Europa LED 10000-236-4K | 66 | 9063 | 1280x152x102 |
| 83VT055371NSP | Europa LED 3550-158-4K | 25 | 3418 | 1580x152x102 |
| 83VT055370NSP | Europa LED 7600-258-4K | 50 | 6836 | 1580x152x102 |
| 83VT055378NSP | Europa LED 12550-258-4K | 80 | 11343 | 1580x152x102 |
| 83VT055419NSP | Europa LED 16700-258-4K | 94 | 14403 | 1580x152x102 |
| 83VT055443NSP | Europa LED 20000-258-4K | 115 | 17110 | 1580x152x102 |



NSP in the article code means:
 Stainless steel diffuser clips.

Accessories EUROPA-LED

There are multiple accessories available for the EUROPA-LED to meet the customers needs.

| Article No. | Description |
|---------------|---|
| 83VT051131 | Suspended mounting, cable suspension EUROPA-2x (3m) |
| 83VT001721 | Suspended mounting, wire suspension EUROPA |
| 83VT051099 | Set of wall brackets angle 45° EUROPA (2 pcs) |
| 83VT051098 | Pole bracket EUROPA (for Ø 50 mm) |
| 83VT001748LAK | Protective cage EUROPA 18W |
| 83VT001749LAK | Protective cage EUROPA 36W |
| 83VT001750LAK | Protective cage EUROPA 58W |
| 83VT008029 | Cable gland PG 13.5 with heavy nut RAL 7004 |
| 83VT008501 | Sealing plug M20 |



Standard mounting
 For ceiling mounting stainless steel mounting clip, comes with the luminaire.

