

**Linear watertight luminaire SALUKA-LED**

Metal dustproof lighting fixture SALUKA-LED with splash water resistance designed for workshops, garages, industrial and production areas.  
 Complies with relevant EMC regulations. Meets photobiological safety according to EN 62471:2009. Suitable for persons with high sensitivity to UV radiation and blue spectrum part.  
 Screwless three-pole terminal block, maximum diameter of wires 2.5mm<sup>2</sup>.  
 Cable gland M20 suitable for cables with outer diameter 7-12mm.  
 Rated voltage 220-240Vac 50/60Hz, 220-240 VDC 0Hz, Electronic ballast.  
 Light color 4000K RA>80, CRI+80, MaxAdam3. (other colors available on request).  
 Designed service life L80B10 70.000 hours at Ta +40°C, L70B10 110.000 hours at Ta +40°C.  
 Diffuser; clear hardened safety glass or Opal mat safety glass.  
 Body of white painted sheet steel RAL 9003 (optional in Stainless Steel AISI 304 or AISI 316).  
 Protection category IP66, IK07 and class I.  
 Temperature operating range from -20°C to +40/45°C and a special version +60°C.  
 HACCP Suitable for food industry.  
 Multiple options on request available such as a dimmable ballast (DALI, DSI, 1-10V), emergency light, through wiring, Gesis connector etc.  
 Tolerance of luminous flux and power input of the lighting fixture +/- 10%.  
 Factory warranty 5 years.




SALUKA-LED Optional Stainless Steel housing available in AISI 304 & AISI 316

**SALUKA-LED**

IP 66



Article No.	Description	Wattage	Lumen output	LxWxH mm	Ta max (°C)	Diffuser
83VT053030	Saluka LED 2500-218-4K	16	2120	705x182x90	45	Clear
83VT053031	Saluka LED 5000-218-4K	33	4166	705x192x90	45	Clear
83VT053032	Saluka LED 5000-236-4K	33	4336	1305x192x90	60	Clear
83VT053033	Saluka LED 10000-236-4K	66	8333	1305x192x92	45	Clear
83VT053034	Saluka LED 7500-258-4K	50	6504	1605x192x92	45	Clear
83VT053035	Saluka LED 12550-258-4K	80	10429	1605x192x92	40	Clear
83VT053036	Saluka LED-OP 2500-218-4K	16	2079	705x182x90	45	Opal
83VT053037	Saluka LED-OP 5000-218-4K	33	4362	705x182x90	45	Opal
83VT053038	Saluka LED-OP 5000-236-4K	33	4254	1305x192x90	60	Opal
83VT053039	Saluka LED-OP 10000-236-4K	66	8724	1305x192x90	45	Opal
83VT053040	Saluka LED-OP 7500-258-4K	50	6381	1605x192x92	45	Opal
83VT053041	Saluka LED-OP 12550-258-4K	80	10918	1605x192x92	40	Opal

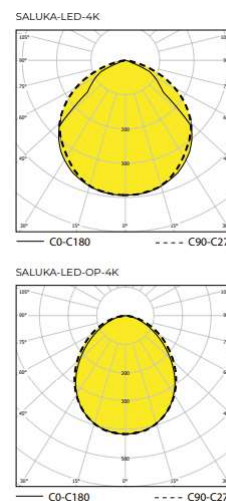

**Accessories SALUKA-LED**

There are multiple accessories available for the SALUKA-LED to meet the customers needs.

Article No.	Description
83VT051139	Saluka set of ceiling brackets (2 pcs) (A)
83VT063754	Saluka set of adjustable bracket (2 pcs) (B)
83VT051145	Saluka pole bracket for Ø 50mm Stainless steel (1 pc) (C)
83VT064018	Saluka pole bracket for Ø 40mm Stainless steel (1 pc) (C)
83VT051147	Saluka wall arm bracket 60° stainless steel (1 pc) (D)

