


### A2FFFC- Ex "d" Cable Gland

<b>Size</b>	: 20mm to 32mm & ½" to 1"	<b>Ingress Protection</b>	: IP66 as per EN 60529.
<b>Standard</b>	: EN60079-0:2012+A11:2013, EN60079-1:2014, EN60079-31:2014	<b>Operating Temp.</b>	: -60°C to +135°C
<b>Function</b>	: Providing flameproof seal on outer sheaths of all types of unarmoured cable in indoor and outdoor hazardous area. With rotating flexible conduit connection facility.	<b>Material</b>	: Brass CW614N/CW617N/EN12165, Stainless Steel 316L
<b>Code of Protection</b>	: Ex db IIC Gb, Ex tb IIIC Db	<b>Thread</b>	: Metric, NPT, BSP, ET and PG
		<b>Features</b>	: Outer Displacement Seal
		<b>Seal Material</b>	: LSOH Silicone Seal & LSOH Nylon Washer
		<b>Accessories</b>	: PVC Shroud, Earth Tag, Thread Seal, Adaptor & Reducer

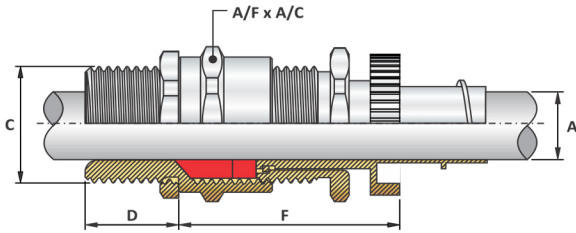

### Gland Selection Chart

Size	Standard Thread Size "C"				Optional Thread		Thread Length "D"	Flexible Conduit Diameter			Cable Range		Protrusion Length "F"	A/F	A/C
	Metric	NPT	ET	PG	Metric	NPT		Size code	Conduit Internal Diameter	Conduit External Diameter	Min.	Max.			
20S	20	½"	¾"	PG13.5	25	¾"	15.00	A040	13.00	20.00	4x6.2	6.8x11.7	35.25	24.00	26.20
20S	20	½"	¾"	PG13.5	25	¾"	15.00	A045	13.90	20.00	4x6.2	6.8x11.7	35.25	24.00	26.20
20S	20	½"	¾"	PG13.5	25	¾"	15.00	A060	14.70	21.50	4x6.2	6.8x11.7	35.75	24.00	26.20
20	20	½"	¾"	PG16	25	¾"	15.00	A040	13.00	20.00	5.7x8	8.7x13.5	36.40	27.00	29.50
20	20	½"	¾"	PG16	25	¾"	15.00	A045	13.90	20.00	5.7x8	8.7x13.5	36.40	27.00	29.50
20	20	½"	¾"	PG16	25	¾"	15.00	A060	14.70	21.50	5.7x8	8.7x13.5	36.40	27.00	29.50
25S	25	¾"	1"	PG21	32	1"	15.00	A110	22.30	28.50	4x6.2	6.8x11.7	45.50	36.00	39.20
25S	25	¾"	1"	PG21	32	1"	15.00	A120	25.10	31.00	5.7x8	8.7x13.5	45.50	36.00	39.20
25	25	¾"	1"	PG21	32	1"	15.00	A110	22.30	28.50	4x6.2	6.8x11.7	45.50	36.00	39.20
25	25	¾"	1"	PG21	32	1"	15.00	A120	25.10	31.00	5.7x8	8.7x13.5	45.50	36.00	39.20
32S	32	1"	1½"	PG29	40	1½"	15.00	A250	28.10	35.80	4x6.2	6.8x11.7	47.00	41.00	45.00
32S	32	1"	1½"	PG29	40	1½"	15.00	A280	30.40	38.00	5.7x8	8.7x13.5	46.50	41.00	45.00
32	32	1"	1½"	PG29	40	1½"	15.00	A250	28.10	35.80	4x6.2	6.8x11.7	47.00	41.00	45.00
32	32	1"	1½"	PG29	40	1½"	15.00	A280	30.40	38.00	5.7x8	8.7x13.5	46.50	41.00	45.00

### Product Code for Ordering Purpose

Size	Type	Material	Thread Type	Shroud Type	Accessories
20s	A2FFFC	Brass-1	Standard Metric-11	PVC Shroud-PS	Steel Lock Nut-5
		Stainless Steel-2	Standard NPT-12	Dip Moulding Shroud-DS	IP Washer-6
		Nickel Plated-3	ET Thread-13	LSF Shroud-LS	Serrated Washer-7
			PG Thread-14	LSOH Shroud-SL	Ingress Disc-8
			BSP Thread-15		
			Optional Metric-16		
			Optional NPT-17		

### How to Order ?

**Item Code:** 20sA2FFFC 1 11 PS 5  
**Code Meaning:** Brass A2FFFC 20s Cable Gland.

20s=Gland Size, A2FFFC=Gland Code,  
 1= With Brass Material, 11=With Standard Metric Thread,  
 PS= With PVC Shroud, 5=With Steel Lock Nut.