


A2FFRF- Ex "d" Cable Gland

Size	: 20mm to 32mm & ½" to 1"	Ingress Protection	: IP66 as per EN 60529.
Standard	: EN60079-0:2012+A11:2013, EN60079-1:2014, EN60079-31:2014	Operating Temp.	: -60°C to +135°C
Function	: Providing flameproof seal on outer sheaths of Flat Form Unarmoured & Braid Armour cable in indoor and outdoor hazardous area with rotating flexible conduit connection facility.	Material	: Brass CW614N/CW617N/EN12165, Stainless Steel 316L
Code of Protection	: Ex db IIC Gb, Ex tb IIIC Db	Thread	: Metric, NPT, BSP, ET and PG
		Features	: Outer Displacement Seal
		Seal Material	: LSOH Silicone Seal & LSOH Nylon Washer
		Accessories	: PVC Shroud, Earth Tag, Thread Seal, Adaptor & Reducer

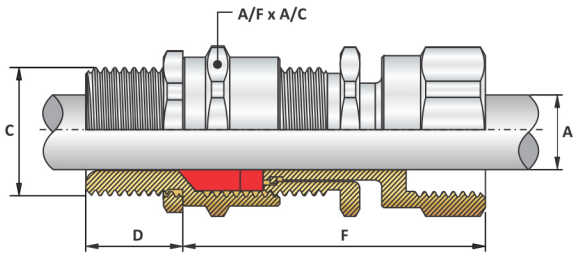

Gland Selection Chart

Size	Standard Thread Size "C"				Optional Thread		Thread Length "D"	Male Conduit Connection Thread			Cable Range		Protrusion Length "F"	A/F	A/C
	Metric	NPT/BSP	ET	PG	Metric	NPT		Metric	NPT	BSP	Min.	Max.			
20S	20	½"	¾"	PG13.5	25	¾"	15.00	20	½"	½"	4x6.2	6.8x11.7	46.80	24.00	26.20
20	20	½"	¾"	PG16	25	¾"	15.00	20	½"	½"	5.7x8	8.7x13.5	47.30	27.00	29.50
25S	25	¾"	1"	PG21	32	1"	15.00	25	¾"	¾"	4x6.2	6.8x11.7	55.30	36.00	39.20
25	25	¾"	1"	PG21	32	1"	15.00	25	¾"	¾"	5.7x8	8.7x13.5	55.30	36.00	39.20
32S	32	1"	1¼"	PG29	40	1¼"	15.00	32	1"	1"	4x6.2	6.8x11.7	60.40	41.00	45.00
32	32	1"	1¼"	PG29	40	1¼"	15.00	32	1"	1"	5.7x8	8.7x13.5	60.40	41.00	45.00

Product Code for Ordering Purpose

Size	Type	Material	Thread Type	Shroud Type	Accessories
20s	A2FFRF	Brass-1	Standard Metric-11	PVC Shroud-PS	Steel Lock Nut-5
		Stainless Steel-2	Standard NPT-12	Dip Moulding Shroud-DS	IP Washer-6
		Nickel Plated-3	ET Thread-13	LSF Shroud-LS	Serrated Washer-7
			PG Thread-14	LSOH Shroud-SL	Ingress Disc-8
			BSP Thread-15		
			Optional Metric-16		
			Optional NPT-17		

How to Order ?

Item Code: 20sA2FFRF 1 11 PS 5
Code Meaning: Brass A2FFRF 20s Cable Gland.

20s=Gland Size, A2FFRF=Gland Code,
 1= With Brass Material, 11=With Standard Metric Thread,
 PS= With PVC Shroud, 5=With Steel Lock Nut.