


A2RM - Conduit Cable Gland

Size	: 16mm to 90mm & ½" to 3½"	Material	: Brass CW614N, Stainless Steel 316L
Standard	: BS 6121:Part-1:2005, EN 50262:1999, IEC62444:2010	Thread	: Metric, NPT
Function	: Providing seal on outer sheaths of all types of unarmoured cable in indoor and outdoor area. With male rigid conduit connection facility	Operating Temp.	: -60°C to +125°C
Ingress Protection	: IP66	Features	: Outer Displacement Seal
		Seal Material	: LSOH Silicone Seal & LSOH Nylon Washer
		Accessories	: PVC Shroud, Earth Tag, Thread Seal

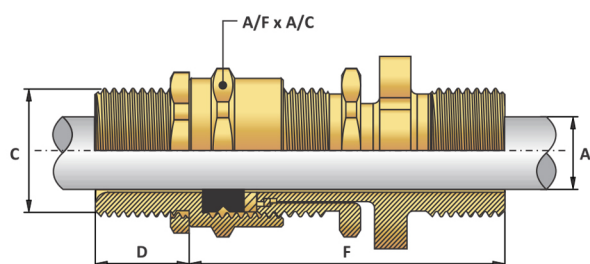

Gland Selection Chart

Size	Standard Thread Size "C"		Optional Thread		Thread Length "D"	Female Conduit Connection Thread			Cable Dia. A		A/F	A/C	Protrusion Length "F"
	Metric	NPT	Metric	NPT		Metric	NPT	BSP	Min.	Min.			
20s16	20	½"	25	¾"	10.00	20	½"	½"	3.10	8.60	24.00	26.25	47.05
20S	20	½"	25	¾"	10.00	20	½"	½"	6.10	11.70	24.00	26.25	46.80
20	20	½"	25	¾"	10.00	20	½"	½"	6.50	13.90	27.00	29.50	47.30
25	25	¾"	32	1"	10.00	25	¾"	¾"	11.30	19.90	36.00	39.20	55.30
32	32	1"	40	1½"	10.00	32	1"	1"	17.00	26.20	41.00	45.00	60.40
40	40	1½"	50	1½"	15.00	40	1½"	1½"	23.60	32.10	50.00	55.00	60.90
50S	50	1½"	63	2"	15.00	50	1½"	1½"	31.50	38.20	55.00	60.00	61.50
50	50	2"	63	2½"	15.00	50	2"	2"	35.80	44.00	60.00	65.00	64.00
63S	63	2"	75	2½"	15.00	63	2"	2"	41.70	50.00	68.00	72.00	62.25
63	63	2½"	75	3"	15.00	63	2½"	2½"	47.50	56.00	75.00	80.00	64.00
75S	75	2½"	90	3"	15.00	75	2½"	2½"	55.00	62.00	80.00	85.00	66.50
75	75	3"	90	3½"	15.00	75	3"	3"	62.00	68.00	85.00	90.00	68.00
90	90	3½"	100	4"	18.00	90	3½"	3½"	67.00	79.00	106.00	118.50	93.00

Product Code for Ordering Purpose

Size	Type	Material	Thread Type	Shroud Type	Accessories
20s16	A2RM	Brass-1	Standard Metric-11	PVC Shroud-PS	Steel Lock Nut-5
		Stainless Steel-2	Standard NPT-12	Dip Moulding Shroud-DS	IP Washer-6
		Nickel Plated-3	Optional Metric-16	LSF Shroud-LS	
			Optional NPT-17		

How to Order ?

Item Code: 20s16A2RM 1 11 PS 5
Code Meaning: Brass A2RM 20s16 Cable Gland.

20s16=Gland Size, A2RM=Gland Code,
 1= With Brass Material, 11=With Standard Metric Thread,
 PS= With PVC Shroud, 5=With Steel Lock Nut.