


Bw-4 Part Cable Gland

Size	: 20mm to 90mm	Material	: Brass CW614N
Standard	: BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010	Thread	: Metric
Function	: Provides mechanical cable retention & electrical continuity via armoured wire termination in indoor area.	Operating Temp.	: -60°C to +200°C
Ingress Protection	: IP2X	Cable Type	: Single Wire Armour (SWA) Cable
		Features	: Armoured Ring
		Accessories	: PVC Shroud, Earth Tag

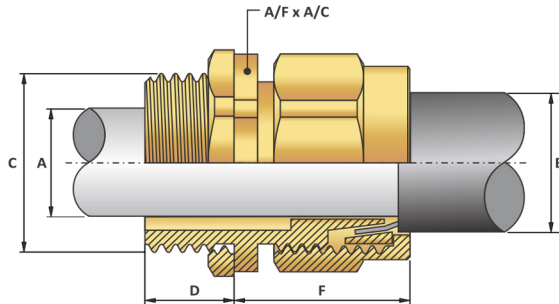

Gland Selection Chart

Size	Standard Thread Size "C"	Thread Length "D"	Cable Diameter		Armour Wire Dia.	Protrusion Length "F"	A/F	A/C
	Metric		Max. "A"	Max. "B"				
20S	20	10.00	12.50	16.00	0.9-1.25	17.00	22.00	24.25
20	20	10.00	15.00	20.00	0.9-1.25	17.50	24.00	26.20
25S	25	10.00	18.50	24.00	1.25-1.60	19.00	30.00	33.00
25	25	10.00	20.50	27.00	1.25-1.60	20.25	32.00	35.00
32S	32	10.00	27.25	34.00	1.60-2.00	20.50	40.50	45.00
32	32	10.00	27.25	34.00	1.60-2.00	20.50	40.50	45.00
40S	40	14.00	31.00	37.50	1.60-2.00	21.00	44.50	50.00
40	40	14.00	34.50	41.00	1.60-2.00	22.00	47.50	52.00
50S	50	14.00	41.00	48.00	2.00-2.50	21.50	56.50	61.50
50	50	14.00	44.50	54.00	2.00-2.50	24.25	61.00	65.00
63S	63	15.00	51.50	59.00	2.50	26.00	67.50	72.00
63	63	15.00	56.75	65.00	2.50	26.00	75.00	80.00
75S	75	15.00	64.00	72.00	2.50	29.25	85.00	90.00
75	75	15.00	69.00	78.00	2.50-3.15	30.25	90.00	95.00
90s	90	16.00	80.00	90.00	3.15	36.50	100.00	110.00
90	90	16.00	80.00	90.00	3.15	36.50	100.00	110.00

Product Code for Ordering Purpose

Size	Type	Material	Thread Type	Shroud Type	Accessories
20S	BW4P	Brass-1	Standard Metric-11	PVC Shroud-PS	IP Washer-6
		Nickel Plated-3		Dip Moulding Shroud-DS	
				LSF Shroud-LS	

How to Order ?

Item Code: 20s16BW4P1 11 PS 5
Code Meaning : Brass BW4P 20s16 Cable Gland.

20s16=Gland Size, BW4P=Gland Code,
 1= With Brass Material, 11=With Standard Metric Thread,
 PS= With PVC Shroud, 5=With Steel Lock Nut.