


BWR Rotary Cable Gland

Size	: 00 to 08	Thread	: Metric
Function	: Providing mechanical cable retention & electrical continuity via armoured wire termination and protect armour wire in dry indoor area for SWA cable.	Operating Temp.	: -60°C to +200°C
Features	: Easy to Install, Rotary Cone, Nickel Plated	Cable Type	: Single Wire Armour (SWA) Cable
Ingress Protection	: IP2X	Material	: Nickel Plated Brass CW614N
		Accessories	: Earth Tag, PVC Shroud

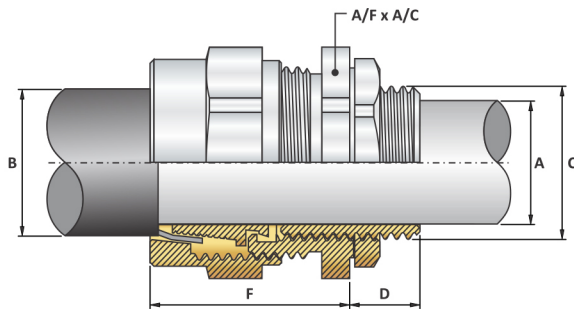

Gland Selection Chart

Gland Size	Thread "C"	Thread Length "D"	Cable Dia.		Protrusion Length "F"	A/F	A/C
			"A" Min.	"B" Max.			
00	M20	16.00	12.00	16.00	28.50	22.00	24.00
01	M20	10.00	14.00	21.20	30.00	27.00	29.50
02	M25	10.00	20.20	27.00	32.00	35.00	38.00
03	M32	10.00	26.20	33.40	37.50	42.00	45.00
04	M40	15.00	32.50	39.80	42.25	52.00	58.00
05	M50	15.00	44.40	52.50	49.00	63.00	70.00
06	M63	15.00	55.30	65.50	49.50	80.00	85.00
07	M75	15.00	69.50	79.00	58.70	95.00	100.00
08	M80	15.00	74.00	84.00	38.00	95.00	100.00

Product Code for Ordering Purpose

Size	Type	Material	Thread Type	Shroud Type
00	BWR	Nickel Plated-3	Standard Metric-11	PVC Shroud-PS
				Dip Moulding Shroud-DS
				LSF Shroud-LS

How to Order ?

Item Code: 00BWR 3 11 PS

Code Meaning: Nickel Plated BWR00 Cable Gland.

00=Gland Size, BWR=Gland Code,
 3= With Nickel Plated Brass Material,
 11=With Standard Metric Thread, PS= With PVC Shroud.