


CX Cable Gland

Size	: 16mm to 90mm & ½" to 3½"	Thread	: Metric, NPT
Standard	: BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010	Operating Temp.	: -20°C to +80°C
Function	: Providing environmental seal on the cable outer sheath. Also provides mechanical cable retention & electrical continuity via armoured wire termination in indoor and outdoor area with all types of SWA cable.	Cable Type	: Wire Braid Armour, Screened Flexible Wire Braid (CY/SY), Pliable Wire Armour (PWA), Steel Tape Armour (STA), Aluminium Strip Armour (ASA)
Ingress Protection	: IP66	Seal Material	: Neoprene
Material	: Brass CW614N, Stainless Steel 316L	Features	: Armoured Ring
		Accessories	: PVC Shroud, Earth Tag, Serrated Washer and Entry Thread Seal

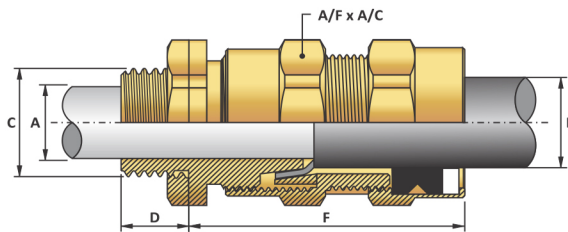

Gland Selection Chart

Size	Thread Size "C"		Optional Thread		Thread Length "D"	Cable Dia. "A" Min.	Cable Dia. "B"		Armour Wire Dia.	Protrusion Length "F"	A/F	A/C
	Metric	NPT	Metric	NPT			Min.	Max.				
20S16	20	½"	25	¾"	10.00	12.50	6.60	13.50	0.3-1.0	35.00	22.00	24.25
20S	20	½"	25	¾"	10.00	12.50	10.20	16.00	0.3-1.0	35.00	22.00	24.25
20	20	½"	25	¾"	10.00	15.00	13.80	20.80	0.4-1.0	34.25	26.00	28.75
25S	25	¾"	32	1"	10.00	18.50	16.50	24.00	0.4-1.2	37.50	30.00	33.00
25	25	¾"	32	1"	10.00	20.50	21.90	27.00	0.4-1.2	38.50	34.00	38.00
32S	32	1"	40	1¼"	10.00	27.25	25.80	34.25	0.4-1.2	39.50	40.50	45.00
32	32	1"	40	1¼"	10.00	27.25	25.80	34.25	0.4-1.2	39.50	40.50	45.00
40S	40	1¼"	50	1½"	14.00	31.00	30.50	38.50	0.4-1.6	43.75	44.50	50.00
40	40	1¼"	50	2"	14.00	34.50	32.50	41.00	0.4-1.6	45.50	47.50	52.00
50S	50	1½"	63	2"	14.00	41.00	37.70	47.00	0.4-1.6	49.00	56.50	61.50
50	50	2"	63	2½"	14.00	44.50	43.00	53.50	0.6-1.6	49.00	61.00	65.00
63S	63	2"	75	2½"	15.00	51.50	48.50	59.00	0.6-1.6	54.75	68.00	73.00
63	63	2½"	75	3"	15.00	56.75	54.50	65.00	0.6-1.6	53.50	75.00	80.00
75S	75	2½"	90	3½"	15.00	64.00	62.75	72.00	0.6-1.6	58.25	83.50	89.00
75	75	3"	90	3½"	15.00	69.00	68.19	79.00	0.6-1.6	59.75	90.00	95.00
90S	90	3½"	100	4"	16.00	80.00	75.00	86.00	0.8-1.6	71.75	100.00	110.00
90	90	3½"	100	4"	16.00	80.00	75.00	86.00	0.8-1.6	71.75	100.00	110.00

Product Code for Ordering Purpose

Size	Type	Material	Thread Type	Shroud Type	Accessories
20s16	CX	Brass-1	Standard Metric-11	PVC Shroud-PS	Steel Lock Nut-5
		Stainless Steel-2	Standard NPT-12	Dip Moulding Shroud-DS	IP Washer-6
		Nickel Plated-3	Optional Metric-16	LSF Shroud-LS	
			Optional NPT-17		

How to Order ?

Item Code: 20s16CX 1 11 PS 5
Code Meaning: Brass CX 20s16 Cable Gland.

20s16=Gland Size, CX=Gland Code,
 1= With Brass Material, 11=With Standard Metric Thread,
 PS= With PVC Shroud, 5=With Steel Lock Nut.