


E1FXFC Ex "d" Cable Gland

Size	: 16mm to 50mm & ½" to 1½"	Operating Temp.	: -60°C to +125°C
Standard	: EN60079-0:2012+A11:2013, EN60079-1:2014, EN60079-31:2014	Material	: Brass CW614N/CW617N/EN12165, Stainless Steel 316L
Application	: For indoor & outdoor hazardous area use with all types of SWA cable providing flameproof seal on cable inner sheath and environmental seal on cable outer sheaths. Also provides mechanical retention & electrical continuity via armour wire termination with rotating flexible conduit connection facility.	Thread	: Metric, NPT, BSP, ET and PG
ATEX Certificate No.	: TI16ATEX 671-3 X	Cable Type	: Wire Braid Armour, Screened Flexible Wire Braid (CY/SY), Pliable Wire Armour (PWA), Steel Tape Armour (STA), Aluminium Strip Armour (ASA)
Code of Protection	: Ex db IIC Gb, Ex tb IIIC Db	Features	: Displacement Seal and Armoured Ring
Ingress Protection	: IP66 as per EN 60529.	Seal Material	: LSOH Silicone Seal & LSOH Nylon Washer
		Accessories	: PVC Shroud, Earth Tag, Thread Seal, Serrated Washer

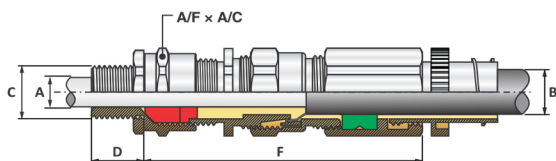

Gland Selection Chart

Size	Standard Entry Thread "C"				Entry Thread Length "D"		Entry Optional Thread "C"		Armoured Wire Diameter for X type		Cable Dia.				Ordering Reference		
	Metric	NPT/BSP	ET	PG	Metric	NPT	Metric	NPT	Min.	Max.	Bedding Dia. "A"		Overall Dia. "B"		Size	Type	Ordering Suffix
											Min.	Max.	Min.	Max.			
20s16	M20x1.5	½"	¾"	PG 11	15.00	15.00	M25x1.5	¾"	0.30	1.00	3.10	8.60	6.10	13.10	20s16	E1FXFC	A066
20s16	M20x1.5	½"	¾"	PG 11	15.00	15.00	M25x1.5	¾"	0.30	1.00	3.10	8.60	6.10	13.10	20s16	E1FXFC	A070
20s16	M20x1.5	½"	¾"	PG 11	15.00	15.00	M25x1.5	¾"	0.30	1.00	3.10	8.60	6.10	13.10	20s16	E1FXFC	A080
20s	M20x1.5	½"	¾"	PG 13.5	15.00	15.00	M25x1.5	¾"	0.30	1.00	6.20	11.70	9.50	15.90	20s	E1FXFC	A066
20s	M20x1.5	½"	¾"	PG 13.5	15.00	15.00	M25x1.5	¾"	0.30	1.00	6.20	11.70	9.50	15.90	20s	E1FXFC	A070
20s	M20x1.5	½"	¾"	PG 13.5	15.00	15.00	M25x1.5	¾"	0.30	1.00	6.20	11.70	9.50	15.90	20s	E1FXFC	A080
20	M20x1.5	½"	¾"	PG 16	15.00	15.00	M25x1.5	¾"	0.40	1.00	6.50	13.90	12.50	20.90	20	E1FXFC	A110
20	M20x1.5	½"	¾"	PG 16	15.00	15.00	M25x1.5	¾"	0.40	1.00	6.50	13.90	12.50	20.90	20	E1FXFC	A120
25	M25x1.5	¾"	1"	PG 21	15.00	15.00	M32x1.5	1"	0.40	1.20	11.30	19.90	19.90	26.20	25	E1FXFC	A250
25	M25x1.5	¾"	1"	PG 21	15.00	15.00	M32x1.5	1"	0.40	1.20	11.30	19.90	19.90	26.20	25	E1FXFC	A280
32	M32x1.5	1"	1¼"	PG 29	15.00	15.00	M40x1.5	1¼"	0.40	1.20	17.00	26.20	23.70	33.90	32	E1FXFC	A300
40	M40x1.5	1¼"	1½"	PG 36	15.00	15.00	M50x1.5	1½"	0.40	1.60	23.60	32.10	27.90	40.40	40	E1FXFC	A450
40	M40x1.5	1¼"	1½"	PG 36	15.00	15.00	M50x1.5	1½"	0.40	1.60	23.60	32.10	27.90	40.40	40	E1FXFC	A500
50s	M50x1.5	1½"	2"	PG 36	15.00	15.00	M63x1.5	2"	0.40	1.60	31.50	38.20	35.20	46.70	50s	E1FXFC	A550

Product Code for Ordering Purpose

Size	Type	Material	Thread Type	Shroud Type	Accessories
20s16	E1FXFC	Brass-1	Standard Metric-11	PVC Shroud-PS	Steel Lock Nut-5
		Stainless Steel-2	Standard NPT-12	Dip Moulding Shroud-DS	IP Washer-6
		Nickel Plated-3	ET Thread-13	LSF Shroud-LS	Serrated Washer-7
			PG Thread-14	LSOH Shroud-SL	
			BSP Thread-15		
			Optional Metric-16		
			Optional NPT-17		

How to Order ?

Item Code: 20s16E1FXFC1 11 PS 5
Code Meaning: Brass E1FXFC 20s16 Cable Gland.

20s16=Gland Size, E1FXFC=Gland Code,
 1= With Brass Material, 11=With Standard Metric Thread,
 PS= With PVC Shroud, 5=With Steel Lock Nut.