


TRS Cable Gland

Size	: 16mm to 50mm	Ingress Protection	: IP66
Standard	: BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010	Material	: Brass CW614N
Function	: Recommended for use with braided, co-axial or SWA cables. A rubber seal compresses on cable to provide a tight fit against cable.	Thread	: Metric
		Features	: Outer Compression Seal
		Accessories	: PVC Shroud, Earth Tag and Serrated Washer

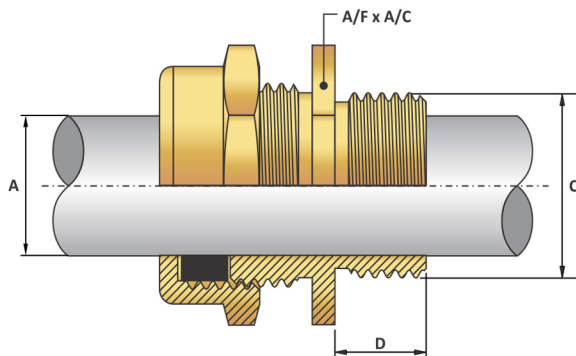

Gland Selection Chart

Gland Size	Entry Thread "C" Metric	Thread Length "D"	Cable Dia. "A"		A/F	A/C
			Max.	Max.		
16	M16	8.00	3.00	7.00	20.00	23.00
20S	M20	10.00	7.00	10.00	24.00	26.20
20	M20	10.00	10.00	14.50	27.00	29.50
25	M25	10.00	14.50	20.50	35.00	39.00
32	M32	10.00	20.50	26.50	43.00	47.50
40	M40	15.00	26.50	34.50	51.50	57.00
50	M50	15.00	34.50	43.50	58.50	65.00

Product Code for Ordering Purpose

Size	Type	Material	Thread Type	Shroud Type	Accessories
16	TRS	Brass-1	Standard Metric-11	PVC Shroud-PS	IP Washer-6

How to Order ?

Item Code: 16TRS 1 11 PS 6
Code Meaning: Nickel Plated M16 TRS Cable Gland.

16=Gland Size, TRS=Gland Code,
 1= With Brass Material, 11=With Standard Metric Thread,
 PS= With PVC Shroud, 6=With IP washer.