


CW Cable Gland

Size	: 16mm to 90mm & ½" to 3½"	Material	: Brass CW614N, Stainless Steel 316L
Standard	: BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010	Thread	: Metric, NPT
Function	: Providing environmental seal on the cable outer sheath. Also provides mechanical cable retention & electrical continuity via armoured wire termination in indoor and outdoor area with all types of SWA cable.	Operating Temp.	: -60°C to +125°C
Ingress Protection	: IP66	Cable Type	: Single Wire Armour (SWA) Cable
		Seal Material	: LSOH Silicone Seal & LSOH Nylon Washer
		Features	: Universal Anyway Clamping Ring, Outer Compression Seal
		Accessories	: PVC Shroud, Earth Tag, Entry Thread Seal

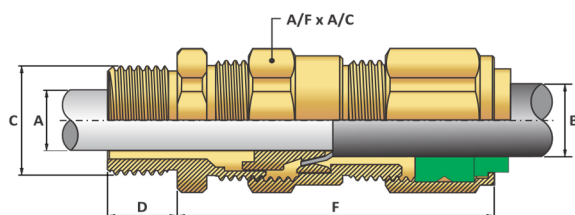

Gland Selection Chart

Size	Standard Thread Size "C"		Optional Thread		Thread Length "D"	Cable Dia. "A" Max.	Cable Dia. "B"		Armour Wire Dia.	Protrusion Length "F"	A/F	A/C
	Metric	NPT	Metric	NPT			Min.	Max.				
20S16	20	½"	25	¾"	10.00	9.00	6.10	13.10	0.90	44.15	24.00	26.20
20S	20	½"	25	¾"	10.00	12.00	9.50	15.90	0.9-1.25	44.15	24.00	26.20
20	20	½"	25	¾"	10.00	14.20	12.50	20.90	0.9-1.25	47.15	30.00	33.00
25S	25	¾"	32	1"	10.00	20.00	14.00	22.00	1.20-1.60	53.85	36.00	39.20
25	25	¾"	32	1"	10.00	20.00	19.90	26.20	1.20-1.60	53.85	36.00	39.20
32	32	1"	40	1½"	10.00	27.00	23.70	33.90	1.60-2.00	54.30	46.00	50.60
40	40	1½"	50	1½"	15.00	33.00	27.90	40.40	1.60-2.00	56.90	55.00	60.00
50S	50	1½"	63	2"	15.00	38.50	35.20	46.70	2.00-2.50	55.75	60.00	65.00
50	50	2"	63	2½"	15.00	44.30	40.40	53.00	2.00-2.50	55.00	70.00	75.00
63S	63	2"	75	2½"	15.00	50.50	45.60	59.40	2.50	57.25	75.00	80.00
63	63	2½"	75	3"	15.00	56.50	54.60	65.80	2.50	59.75	80.00	85.00
75S	75	2½"	90	3"	15.00	62.50	59.00	72.00	2.50	65.50	90.00	95.00
75	75	3"	90	3½"	15.00	68.30	66.70	78.40	2.50	67.75	100.00	110.00
90	90	3½"	100	4"	20.00	80.50	76.20	90.30	2.50-3.15	77.00	112.00	122.00

Product Code for Ordering Purpose

Size	Type	Material	Thread Type	Shroud Type	Accessories
20s16	CWCM	Brass-1	Standard Metric-11	PVC Shroud-PS	Steel Lock Nut-5
		Stainless Steel-2	Standard NPT-12	Dip Moulding Shroud-DS	IP Washer-6
		Nickel Plated-3	Optional Metric-16	LSF Shroud-LS	
			Optional NPT-17		

How to Order ?

Item Code: 20s16CWCM1 11 PS 5
Code Meaning: Brass CWCM 20s16 Cable Gland

20s16=Gland Size, CWCM=Gland Code,
 1= With Brass Material, 11=With Standard Metric Thread,
 PS= With PVC Shroud, 5=With Steel Lock Nut.